

DEWALT®

100
YEARS

SPS
Pneumatic Tools



Contact Us

Sales-
+91 9811579961

SPS Lucknow-
+91 88105 53875

Sushil Mishra-
+91 7011218105

Phone-
011-47002673

Email Us

staplespackagingsolutions@gmail.com



Visit Our Website

spspneumatictools.com

PRODUCT CATALOG 2024

GUARANTEED TOUGH.®



WHY CHOOSE DEWALT®?

DEWALT® is a market-leading manufacturer of premium power tools, accessories, storage, hand tools, outdoor equipment, anchors and fixings that provides a fully integrated system solution for various applications.

DEWALT® tools offer unparalleled performance, with durable construction for a professional finish. Rely on DEWALT® to get the job done, with a 3-year guarantee on most tools.

INNOVATION THAT MATTERS

DEWALT® is out there on the jobsite learning what works and what doesn't so we can make it all work better. Every innovation we make is driven by a desire to increase performance and ease of user productivity.

We change a tool because the change makes the tool work better for the professional using it, not just for the sake of change.

From technology used in space exploration and aircraft to incorporating Bluetooth® technology into our products DEWALT stays at the forefront of jobsite innovation.

*The Bluetooth® word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. and any use of such marks is under license.



BUILDING LOYALTY VIA EFFECTIVE TESTING

USER LOYALTY

DEWALT® guarantees to deliver and service high performance solution that enable the end-user to achieve productive and professional results.

The cast-iron DEWALT® guarantee and premium service TOUGH® – in the hands of real users. network ensure that our users have faith in the quality of our products. First-time buyers will become loyal DEWALT® users.

END USER TESTING

Every one of our products are tested at length by genuine construction professionals, ensuring they never let a user down. Under the most demanding jobsite conditions, DEWALT® tools earn the right to be labelled GUARANTEED TOUGH®.

WE ARE DEWALT, AND WE ARE GUARANTEED TOUGH

DEWALT®

100 YEARS



1924

Raymond DeWalt forms the DEWALT Products Company



1929

DEWALT Products Co. moves to a new plant and office building in Lancaster, PA



1947

DEWALT Products Co. re-incorporates under DEWALT Inc.



1953

DEWALT Inc. extends operations into Canada



1960

Black & Decker acquires DEWALT Inc.



2013

DEWALT introduced its cordless 20VMAX® - XR line of brushless power tools



2016

The FLEXVOLT® is the world's first battery that automatically changes voltage when the user changes tools



2017

DEWALT introduces the innovative BREAKAWAY™ Reciprocating Saw Blades



2021

DEWALT® POWERSTACK® pouches with pouch cell battery technology



2021

TOUGHSYSTEM® 2.0 STORAGE with IP65 to built to handle it

From our rich history and proven performance to our focus on innovation and technology. DEWALT continues to design and optimize professional jobsite solutions - tools, accessories and service to meet the toughest conditions.

YOU BUY A MACHINE AND WHAT
YOU REALLY GET IS SATISFACTION,
ENTIRE SATISFACTION.



Raymond DeWalt
DEWALT FOUNDER



1992

DEWALT launches its first line of portable electric power tools and accessories



2005

The SHOCKS - Active Vibration Control® reduces vibration by up to 50%



2010

DEWALT's 12V MAX* System of lithium ion tools feature compact designs with power and features needed for the job site



2011

DEWALT expands its lithium ion tools with a new 20V MAX* System



2012

The Perform and Protect line of products provides a high level of control, dust containment or low vibration



2022

DEWALT adds the first-ever cordless ratchets to its product portfolio, expanding the DEWALT XTREME™ 12V MAX* and ATOMIC COMPACT SERIES™ 20V MAX* lineups



2023

IMPACT CONNECT™ to revolutionise traditionally manual tasks. CUTTING-EDGE TRADE INNOVATION



2024

Celebrating a century of excellence, DEWALT continues to empower professionals worldwide with unparalleled quality and cutting-edge technology. As we commemorate our centenary, DEWALT reaffirms its legacy of reliability, celebrating a century of craftsmanship while paving the way for the future.



CONTENTS

CORDLESS POWER TOOLS

P.7



CORDLESS BARE TOOLS

P.19



BATTERIES & CHARGERS

P.31



CORDED POWER TOOLS

P.35



CORDLESS POWER TOOLS

Cordless Drill Drivers.....	09
Cordless Hammer Drill Drivers.....	11
Cordless Impact Drivers.....	13
Cordless Impact Wrenches.....	14
Cordless SDS Plus Hammers.....	16
Cordless Grinders.....	17
Other Cordless Tools.....	18

DEWALT®

100

YEARS

12V 2.0AH COMPACT DRILL DRIVER

DCD700D2

Voltage	Battery	12V Max
Capacity	Max Torque	2.0 Ah
Chuck	Capacity Max	24 Nm
Drilling	Capacity	10 mm
(Wood)	Max Drilling	20 mm
Capacity	(Metal)	10 mm
Weight (Bare Tool)	No Load Speed	0.91 Kg
		0 - 400 / 1500 rpm



ALSO AVAILABLE AS:

DCD700D2 (WITH 109 PCS ACCESSORY KIT)

12V 2.0AH CORDLESS DRILL DRIVER.

DCD710D2

Voltage	12V Max
Battery Capacity	2.0 Ah
Max. Torque (Soft / Hard)	15 / 24 Nm
No Load Speed	0-400 / 1500 rpm
Chuck Capacity	1-10 mm
Max. Drilling Capacity [Wood / Metal]	20 / 10 mm
Weight (Bare Tool)	1.1 kg
Length x Height	185 x 195 mm



12V 2.0AH BURSHLESS MULTI-HEAD DRILL

DCD703D2

Motor Type	Brushless
Voltage V	12V Max
No Load Speed	0-425 / 1500 rpm
Max Torque (Hard / Soft)	57.5 / 25.5 Nm
Chuck Capacity	10 m m
Max Drilling Capacity (Wood)	20 mm
Max Drilling Capacity (Metal)	10 mm
Weight (Bare Tool)	0.73 Kg



BRUSHLESS
12V XR

20V MAX 2AH COMPACT BRUSHLESS DRILL DRIVER

DCD7771D2

Voltage	20V Max 2.0
Battery Capacity	Ah 65 Nm 26
Max Torque (Hard)	Nm
Max Torque (Soft)	0-500 / 1750
No Load Speed	rpm
Chuck Capacity	1.5-13 mm
Max. Drilling Capacity [Wood/Metal]	30/13 mm
Weight (Bare Tool)	1.15 kg
Length x Height	192 x 198 mm



BRUSHLESS

18V XR

20V MAX 1.5AH COMPACT BRUSHLESS DRILL DRIVER

DCD708S2T

Voltage	20V Max
Battery Capacity	1.5 Ah
Max. Torque (Hard/Soft)	65/26Nm
No Load Speed	0-450 / 1650 rpm
Chuck Capacity	1.5-13 mm
Drilling Capacity [Wood/Metal]	35/13 mm
Weight (Bare Tool)	1.45 kg
Length x Height	160 x 198 m
Availabe in T Stak Box	



BRUSHLESS

18V XR

20V MAX 1.5AH COMPACT DRILL DRIVER

DCD771S2

Voltage	20V Max 1.5
Battery Capacity	Ah 42 Nm 24
Max. Torque (Hard)	Nm
Max. Torque (Soft)	0-450 / 1500
No Load Speed	rpm
Chuck Capacity	1.5-13 mm
Max. Drilling Capacity [Wood/Metal]	25/13 mm
Weight (Bare Tool)	1.65 kg
Length x Height	219 x 191 mm



12V MAX 2.0AH HAMMER DRILL DRIVER

DCD716D2

Voltage	12V Max
Battery Capacity	2.0 Ah
Max. Torque (Soft / Hard)	16 / 30 Nm
No Load Speed	0-1050 min-1
Beats per Minute	0-6000 / 22500 bpm
Chuck Capacity	1-10 mm
Max. Drilling Capacity [Wood / Metal / Masonry]	20 / 10 / 8 mm
Weight (Bare Tool)	1.18 kg
Length x Height	200 x 210 mm



20V MAX 1.5AH HAMMER DRILL DRIVER

DCD776S2

Voltage	20V Max
Battery Capacity	1.5 Ah
Max. Torque (Hard)	42 Nm
Max. Torque (Soft)	24 Nm
No Load Speed	0-450 / 1800 rpm
Beats Per Minute	0-7650 / 25500 bpm
Chuck Capacity	1.5-13 mm
Max. Drilling Capacity [Wood/Metal/Masonry]	30/13/13 mm
Weight (Bare Tool)	1.7 kg
Length x Height	228 x 191 mm



20V MAX 2.0AH COMPACT BRUSHLESS HAMMER DRILL

DCD7781D2

Voltage	20V Max
Battery Capacity	2.0 Ah
Max Torque (Hard)	65 Nm
Max Torque (Soft)	26 Nm
No Load Speed	0-500 / 1750 rpm
Beats per Minute	0-8500 / 29750 bpm
Chuck Capacity	1.5-13 mm
Max. Drilling Capacity [Wood/Metal/Masonry]	28/13/13 mm
Weight (Bare Tool)	1.18 kg
Length x Height	204 x 198 mm



20V MAX 1.5AH COMPACT BRUSHLESS HAMMER DRILL DRIVER

DCD709S2T

Voltage	20V Max
Battery Capacity	1.5 Ah
Max. Torque (Hard/Soft)	65/26 Nm
No Load Speed	0-450 / 1650 rpm
Beats Per Minute	0-7650 / 28050 bpm
Chuck Capacity	1.5-13 mm
Drilling Capacity [Wood/Metal/Masonry]	13/13/13 mm
Weight (Bare Tool)	1.2 kg
Length x Height	175 x 198 mm
Available in T Stack Box	



BRUSHLESS

18V XR

20V MAX 5.0AH PREMIUM BRUSHLESS HAMMER DRILL DRIVER

DCD996P2

Voltage	20V Max 5.0 Ah 95
Battery Capacity	Nm 66 Nm 0-
Max. Torque (Hard)	450/1300/2000 rpm
Max. Torque (Soft)	0-8600/25500/38250
No Load Speed	bpm 1.5-13 mm
Beats Per Minute	
Chuck Capacity	
Max. Drilling Capacity [Wood/Metal/Masonry]	55/15/16 mm
Weight (Bare Tool)	2.2 kg
Length x Height	213 x 208 mm

* Till Stocks Last




BRUSHLESS

18V XR

ALSO AVAILABLE AS:

DCD996NT (with T Stack box)

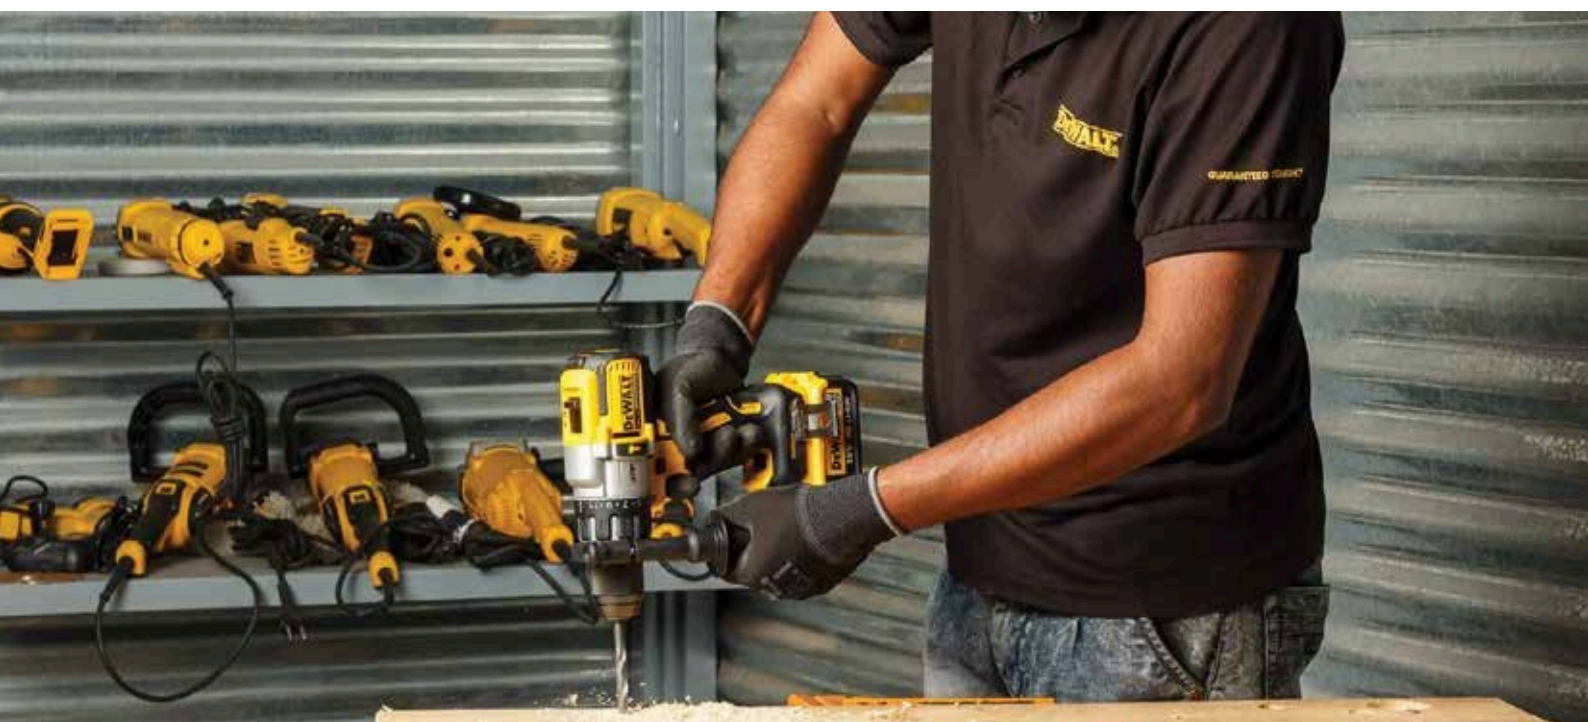

12V 2.0AH COMPACT BRUSHLESS IMPACT DRIVER**DCF801D2**

Motor Type	Brushless
Voltage	12V 2.0 Ah
Battery Capacity	0-2850
No-load speed	rpm
Precision Mode	0-950 min-
Low Mode	1
High Mode	0-1950
Impact rate	min-1
Max. torque	0-2850
Tool holder	min-1
Weight (Bare Tool)	0-3600
	min-1
	163 Nm
	6.35 mm
	0.8 kg

**BRUSHLESS****12V XR****18V 2.0AH 3 SPEED BRUSHLESS IMPACT DRIVER****DCF850D2**

Motor Type	Brushless
Voltage	18V
Battery Capacity	2.0 Ah
Max. Torque	205 Nm
No Load Speed	
Mode 1	0-1000 rpm
Mode 2	0-2800 rpm
Mode 3	0-3250 rpm
Impact Rate	0-3800 ipm
Mode Select	3 Speed
Length	100 mm
Weight (Bare Tool)	0.95 kg

**BRUSHLESS****18V XR****18V XR 3.0AH IMPACT BRUSHLESS DRIVER KIT****DCF809L2T**

Motor Type	Brushless
Voltage	18V
Battery Capacity	3.0 Ah
Max. Torque	190 Nm
No Load Speed	0-2800 rpm
Impacts Per Minute	0-3200 ipm
Max. Bolt Dia.	M12
Tool Holder	6.35 mm
Weight (Bare Tool)	(1/4")
Length x Height	1.25 kg
Available in T Stak Box	130 x 236 mm

**BRUSHLESS****18V XR**

12V 2.0AH SUB-COMPACT IMPACT WRENCH

DCF902D2

Motor Type	Brushless
Voltage	12V
Battery Capacity	2.0 Ah
Tool Holder	3/8"/9.5 mm
Max. Torque	168 Nm
No Load Speed	
Precision Mode	0-2850 min-1
Lo Mode	0-1000 min-1
Hi Mode	0-2850 min-1
Weight (Bare Tool)	0.8 kg
Length x Height	125 x 188 mm



BRUSHLESS

18V XR

20V MAX 5.0AH 1/2" BRUSHLESS COMPACT IMPACT WRENCH

DCF911P2

Motor Type	Brushless
Voltage V	s 20V
Battery Capacity	Max
No-load speed	5 Ah 0-
Impact rate	2850 rpm
Max tightening torque	0-3250
Max breakaway torque	ipm
Tool holder	338 Nm
Weight (Bare Tool)	542 Nm
	12.7 mm
	1.0 Kg



BRUSHLESS

18V XR

20V MAX 4.0AH 1/2" COMPACT IMPACT WR - DETENT

DCF922M2

Motor Type	Brushless
Voltage V	20V Max
Battery Capacity	4.0 A
No-load speed	0-2500 min-1
Impact rate	0-3550
Max tightening torque	min-1
Max breakaway torque	min-1
Tool holder	406 Nm
Weight (Bare Tool)	610 Nm
	12.7 mm
	1.1 Kg



ALSO AVAILABLE AS:
DCF922N

20V MAX 5.0AH 1/2" MID-RANGE IMPACT WRENCH

DCF892P2T

Volatage	20V	Max
Battery Capacity	5.0 Ah	
No Load Speed	0-2000	min-1
Imapact rate	0-3250	min-1
Max Tightening Torque	812 Nm	
Precision Wrench™ mode	136 Nm	
Low Mode	406 Nm	
Medium mode	812 Nm	
High mode	1084 Nm	
Max breakaway torque	12.7 mm	
Tool holder	1.67 kg	
Weight (Bare Tool)	Available in T Stak Box	



BRUSHLESS

18V XR

18V 5.0AH HIGH TORQUE IMPACT WRENCH

DCF899P2

Motor Type	Brushless
Voltage	18V
Battery Capacity	5.0 Ah
Max. Torque	950 Nm
Breakaway Torque	1625 Nm
No Load Speed	0-400/1200/1900 rpm
Impacts Per Minute	0 - 2300 ipm
Max. Bolt Diameter	M22
Tool Holder	1/2" (13 mm)
Weight (Bare Tool)	3.22 kg
Length x Height	224 x 278 mm



BRUSHLESS

18V XR

* Till Stocks Last

ALSO AVAILABLE AS:

DCF899NT(With T Stak Box)



18V 4.0AH COMPACT BRUSHLESS HAMMER

DCH172M2

Motor Type	Brushless
Voltage	18V
Battery Capacity	4.0 Ah
Tool Holder	SDS-Plus
Impact Energy (EPTA 05/2009)	1.4 J
No Load Speed	0-1060 rpm
Blows per Minute	0-4980 bpm
Optimum Drilling Capacity	4-10 mm
Max. Drilling Capacity [Concrete/Wood/Metal]	16/30/13 mm
Weight (Bare Tool)	1.78 kg
Length x Height	265 x 73 mm



BRUSHLESS

18V XR

18V 4.0AH BRUSHLESS SDS PLUS HAMMER

DCH133M1

Motor Type	Brushless
Voltage	18V
Battery Capacity	4.0 Ah
Tool Holder	SDS-Plus
Max. Impact Energy	2.8 J
Impact Energy (EPTA 05/2009)	2.6 J
No Load Speed	0-1500 rpm
Blows Per Minute	0-5500 bpm
Optimum Drilling Capacity [Concrete]	4-14 mm
Max. Drilling Capacity [Concrete/Wood/Metal]	26/30/13 mm
Chipping Mode	Yes
Weight (Bare Tool)	2.3 kg
Length x Height	383 x 161 mm



BRUSHLESS

18V XR

ALSO AVAILABLE AS:

DCH133NT

18V 5.0AH BRUSHLESS SDS PLUS HAMMER

DCH263P2

Motor Type	Brushless
Voltage	18V
Battery Capacity	5.0 Ah
Single impact energy	3.0 J
No Load Speed	0-1165 min-1
No-Load Impact Rate	0-4300 bpm
Maximum Core Drilling Capacity in Soft Brick	65 mm
Max. Drilling Capacity [Concrete/Wood/Metal]	28/30/13 mm
Collar Diameter	54 mm
Weight (Bare Tool)	2.7kg
Length x Height	125 x 188 mm



BRUSHLESS

18V XR

18V 5.0AH BRUSHLESS SLIDE MAG KIT

DCG405P2

Motor Type	Brushless	
Voltage	18V 5.0 Ah	
Battery Capacity	18V 5.0 Ah	
Disc Diameter DCG405P2 (XJ)	125	mm
Disc Diameter DCG405P2 (IN)	100	mm
No Load Speed	9000	rpm
Spindle Thread	M14 / M10	
Switch Type	Slider	1.74
Weight (Bare Tool)	kg	310 x
Length x Height	125 mm	



BRUSHLESS
18V XR

ALSO AVAILABLE AS:
DCG405P2-IN (DISC DIAMETER: 100 MM)
DCG405P2-XJ (DISC DIAMETER: 125 MM)

CORDLESS TOOLS - GRINDERS



20V MAX 5.0AH BRUSHLESS DUAL ACTION POLISHER

DCM848P2

Motor Type	Brushless
Voltage V	20V Max
Battery Capacity	5.0 Ah
No Load Speed	2000 - 5500 opm
Max. Disc Diameter	125 mm
Switch Type	Trigger
Variable Speed	Yes



BRUSHLESS
18V XR

18V 5.0AH BRUSHLESS CONCRETE NAILER

DCN890P2

Voltage	18V
Battery Capacity	5.0 Ah
Nail Diameter	2.6 - 3.7 mm
Nail Length	13 - 57 mm
Nail Width	5.6 - 6.4 mm
MagazineAngle	15°
Magazine Capacity	Up to 30 Nails
MagazineLoading	Underneath
Operating Mode	Sequential and Rapid Cycle
Nose Included	Non magnetic / Drywall nose
Weight (Bare Tool)	4.8 kg
Length x Height	415 x 390 mm



BRUSHLESS
18V XR

18V XR 2.0AH 16GA FINISH NAILER

DCN660D2

Voltage	18V
Battery Capacity	2.0Ah
Nail Diameter	1.6 mm
Nail Length	32 - 63 mm
MagazineAngle	20°
Magazine Capacity	110 Nails
MagazineLoading	Rear
Operating Mode	Bump and Sequential
Weight (Bare Tool)	2.8 kg
Lengthx Height	310 x 305 mm



BRUSHLESS
18V XR

CORDLESS BARE TOOLS

CORDLESS BARE TOOLS

DRILL DRIVERS.....	20	RATCHET.....	26
HAMMER DRILL DRIVER.....	20	HEAT GUN.....	26
IMPACT DRIVERS.....	21	OSCILLATING TOOL.....	26
IMPACT WRENCHS.....	21	SANDER.....	27
SAG.....	23	SHEAR.....	27
HAMMERS.....	24	SDS - PLUS HAMMER.....	28
CIRCULAR SAWS.....	25	DRILL DRIVER (TSTAK).....	28
RECIP SAWS.....	25	LIGHTS.....	29
BLOWER.....	25	JBSITE FAN.....	30

20V MAX BRUSHLESS DRILL DRIVER

DCD708N

Voltage	20V Max
Max. Torque (Hard/Soft)	65/26Nm
No Load Speed	0-450 / 1650 rpm
Chuck Capacity	1.5-13 mm
Drilling Capacity [Wood/Metal]	35/13 mm
Weight (Bare Tool)	1.45 kg
Length x Height	160 x 198 mm



BRUSHLESS

18V XR

20V MAX BRUSHLESS HAMMER DRILL DRIVER

DCD709N

Voltage	20V Max
Max. Torque (Hard/Soft)	65/26 Nm
No Load Speed	0-450 / 1650 rpm
Beats Per Minute	0-7650 / 28050 bpm
Chuck Capacity	1.5-13 mm
Drilling Capacity [Wood/Metal/Masonry]	55/13/13 mm
Weight (Bare Tool)	1.2 kg
Length x Height	175 x 198 mm



BRUSHLESS

18V XR

20V MAX BRUSHLESS HAMMER DRILL DRIVER

DCD805N

Motor Type	Brushless
Voltage V # of	20V Max
Speeds No	2
Load Speed	0 - 650 / 2000 rpm
Hammer Mode	0 - 11050 / 34000 bpm
Torque (Hard/Soft)	90 / 27 Nm
Chuck Capacity	1.5 - 13mm
Weight (Tool only)	3-Mode F
Length	1.3 Kg
Width	163.8 / 177 mm
	63.5 mm

Max Drilling Capacity	
wood / metal / masonry	55/13/13 mm



BRUSHLESS

18V XR

18V BRUSHLESS IMPACT

DCF867N	18V
Voltage V Max. Torque	205 N m
No Load Speed	0 -1000 / 2800 / 3250 rpm
Impacts Per Minute	0 - 3800 ipm
Max. Bolt Diameter	M14
Tool Holder	6.35 mm (1/4")
Length x Height	134 x 245 mm
Weight (Bare Tool)	0.9 Kg

* Till Stocks Last



20V MAX BRUSHLESS IMPACT DRIVER

DCF850N

Motor Type	Brushless
Voltage	20V Max
Fastening Torque	205 Nm
No Load Speed	0 -1000 / 2800 / 3250 rpm
Impact Rate	0 - 3800 ipm
LED	3 LED, Halo Light Ring
Accessories	Belt Hook
Mode Select	3 Speed
Weight	0.9 Kg
Length	100 mm

BRUSHLESS
18V XR

20V MAX BRUSHLESS IMPACT WRENCH

DCF911N

Motor Type	Brushless
Voltage	20V Max
No-load speed	0 -1000 / 2800 / 3250 rpm
Impact rate	0-3250 ipm
Max tightening torque	338 Nm
Max breakaway torque	542 Nm
Tool holder	12.7 mm
Weight (Bare Tool)	1.0 Kg

BRUSHLESS
18V XR

20V MAX 1/2" BRUSHLESS COMPACT IMPACT WR - DETENT

DCF922N

Motor Type	Brushless
Voltage V	20V Max
No-load speed	0-2500
Impact rate	min-1 0-
Max tightening torque	3550 min-
Max breakaway torque	1
Tool holder	406 Nm
Weight (Bare Tool)	610 Nm
	12.7 mm
	1.1 Kg

BRUSHLESS
18V XR

20V MAX 1/2" BRUSHLESS HT IMPACT WRENCH

DCF892N

Volatage	20V Max
No Load Speed	0-2000
Imapact rate	min-1 0-
Max Tightening Torque	3250 min-
Precision Wrench™ mode	812 Nm
Low Mode	136 Nm
Medium mode	406 Nm
High mode	812 Nm
Max breakaway torque	1084 Nm
Tool holder	12.7 mm
Weight (Bare Tool)	1.67 kg

BRUSHLESS
18V XR

20V MAX 3/4" BRUSHLESS HT IMPACT WRENCH

DCF897N

Motor Type	Brushless
Voltage V	20V Max
Max. Torqu e	136 / 407 / 950 Nm
Breakaway Torque	1627 Nm
No Load Speed	0 - 400 / 1200 / 1900 rpm
Impa cts Per Minute	0 - 2400 ipm
Max. Bolt Diameter	M24
Tool Holder	3/4" (19 mm)
Length x Height	224 x 278 mm

BRUSHLESS
18V XR

20V MAX 1/2" BRUSHLESS HT IMPACT WRENCH

DCF900N

Motor Type	Brushless
Voltage	20V Max
No Load Speed	0-2300
Impact rate	min-1
Max Tightening Torque	0-2200 min-1
Precision Wrench™ Mode	1396 Nm
Low Mode	135 Nm
Medium Mode	813 Nm
High Mode	1396 Nm
Max Breakaway Torque	1898 Nm
Anvil Type	Hog Ring
Tool Holder	12.7 mm
Weight (Without Battery Pack)	2.9 Kg



20V MAX BRUSHLESS SAG

DCG405N

Motor Type	Brushless
Voltage	18V
Disc Diameter DCG405P2 (XJ)	125 mm
Disc Diameter DCG405P2 (IN)	100 mm
No Load Speed	9000 rpm
Spindle Thread	M14 / M10
Switch Type	Slider
Weight (Bare Tool)	1.74 kg
Length x Height	310 x 125 mm



ALSO AVAILABLE

AS: (DISC DIAMETER: 100
DCG405N- (DISC DIAMETER:
B1 125 MM)
DCG405N-



26MM SDS PLUS CORDLESS HAMMER

DCH133N

Motor Type	Brushless
Voltage	18V
ool Holder	SDS-Plus
Max. Impact Energy	2.8 J
Impact Energy (EPTA 05/2009)	2.6 J
No Load Speed	0-1500 rpm
Blows Per Minute	0-5500 bpm
Optimum Drilling Capacity [Concrete]	14 mm
Max. Drilling Capacity [Concrete/Wood/Metal]	26/30/13 mm
Chipping Mode	Yes
Weight (Bare Tool)	2.3 kg
Length x Height	383 x 161 mm



28MM SDS PLUS CORDLESS HAMMER

DCH263N

Motor Type	Brushless
Voltage	18V
Single impact energy	3.0 J
No Load Speed	0-1165 min-1
No-Load Impact Rate	0-4300 bpm
TMaximum Core Drilling Capacity in Soft Brick	65 mm
Max. Drilling Capacity [Concrete/Wood/Metal]	28/30/13 mm
Collar Diameter	54 mm
Weight (Bare Tool)	2.7kg
Length x Height	125 x 188 mm



20V MAX BRUSHLESS CIRCULAR SAW

DCS570N



20V MAX BRUSHLESS RECIP SAW

DCS369N



20V MAX BRUSHLESS BLOWER

DCV100



20V MAX 1/2" BRUSHLESS RATCHET

DCF512N

Motor Type	Brushless
Voltage	20V Max
Drive Style	1/2"
Fastening Torque	95 Nm
No Load Speed	0 - 270 rpm
Led	Yes
Head Type	Open
Length (mm)	360 mm



BRUSHLESS

18V **XR**

20V MAX BRUSHLESS HEAT GUN

DCE530N

Motor Type	Brushless 20V
Voltage	Max
Temperature oC	290 - 530
Air ow L/Min	109 - 190
Integrated LED Light	Yes
Dimensions	160 x 55 x 200 mm
Weight	0.5 Kg



BRUSHLESS

18V **XR**

20V MAX XR OSCILLATING BRUSHLESS MULTI-TOOL 3SP BARE

DCS356N

Power Output	300 MWO
Oscillations per Minute	0 - 20000 opm
Oscillating Angle	1.6 o
Tool free Accessory Fitment	Yes
Weight	1.1 Kg
Length	310.0 mm
Hand/ Arm Vibration	10.5 m/s ²
Uncertainty K 1 (Vibration)	1.5 m/s ²



BRUSHLESS

18V **XR**

18V XR BRUSHLESS RANDOM ORBITAL SANDER

DCW210N

OPM	8000 - 12000
Orbit Size	opm 2.6 mm
Paper Size	125 mm
Weight (Bare Tool)	0.93 Kg
Tool Height	127 mm
Vibration Value	4.3 m/s ²



BRUSHLESS

18V XR

CORDLESS BARE TOOL - SANDER

18V 2450SPM METAL SHEAR

DCS491NT

Voltage	18V	0-2450
No Load Stroke Rate	spm	1.3
Cutting Capacity [Mild Steel]	mm	1.0 mm
Cutting Capacity [Stainless Steel]	1.8 Kg	394
Weight	x 200 mm	
Length x Height		



CORDLESS BARE TOOL - SHEAR



54V XR SDS-PLUS HAMMER

DCH333NT

Voltage	54V
No-load speed	0 - 1000 rpm
No-load Impact rate	0 - 4480 bpm
Single impact energy (EPTA 05/2009)	3.5 J
Maximum drilling range in steel/wood/concrete	13/30/30 mm
Tool holder	SDS-Plus
Collar diameter	54 mm
Weight (Bare Tool)	3.7 Kg



18V XRP DRILL DRIVER BARE TSTAK KITBOX

DCD991NT

Voltage	18V 95 Nm 66 Nm
Max. Torque (Hard)	0-450/1300/2000
Max. Torque (Soft)	rpm 1.5-13 mm
No Load Speed	55/15 mm 2.1 Kg
Chuck Capacity	200 X 208 mm
Max. Drilling Capacity [Wood/Metal]	
Weight	
Length x Height	



20V XR MAX LED FLASHLIGHT

DCL040

Voltage	20V Max
Bulb Type	LED
Light Output	110 lm
Runtime	25 Hrs (5.0Ah battery)
Weight	0.6 Kg
Length x Height	115 x 240 mm



20V MAX LED HAND HELD AREA LIGHT

DCL050

Voltage	20V Max
Brightness	250-500 Lm
Technology	LED
Runtime	5-10 Hrs
No. of LEDs	3
Length	373 mm
Weight	0.660 Kg
IP Rating	54
Pivoting head	Yes
Hang Hook	Yes



20V MAX TRIPOD LIGHT

DCL079

Voltage	20V	Max
Brightness	3000	lm
Beam Pattern	max	
Runtime	Area	
Light settings	5h (max/9Ah)	
IP Rating	3	
Pivoting head	IP55	
Integral stand	Yes	
Weight	Yes	
	7.4 Kg	



20V MAX SPOT LIGHT

DCL043

Voltage	20V	Max
Brightness	1000	Lm
Technology	Max	
Runtime	LED	
Light settings	10h	
Flashing/strobe mode	2	
Focusable beam	No	
IP Rating	No	
Pivoting head	IP54	
Hang Hook/Stand	Yes	
Weight	Yes	
	0.90 Kg	



20V MAX BRUSHLESS JOBSITE FAN

DCE512N

Motor Type	Brushless
Voltage	20V Max
Drive Size	12.7 mm
No Load Speed (RPM)	250 rpm
Fastening Torque	95 Nm
Weight (Tool Only)	1.05 Kg
Length	360 mm



BRUSHLESS

18V XR

BATTERIES & CHARGERS

BATTERIES	32
CHARGERS	33

12V MAX 2.0AH XR LI-ION BATTERY PACK
DCB127


Voltage	10.8V / 12V Max
Battery Capacity	2.0Ah
Tool Compatibility	All 10.8V/12V Max Li-Ion DEWALT tools
Weight	0.2 Kg
Length x Height	85 x 35 mm

DCB181


Voltage	18V / 20V Max
Battery Capacity	1.5 Ah
Tool Compatibility	All 18V/20V Max Li-Ion DEWALT tools
Weight	0.35 Kg
Length x Height	110 x 45 mm

18V 2.0AH XR LI-ION BATTERY PACK
DCB183


Voltage	18V / 20V Max
Battery Capacity	2.0Ah
Tool Compatibility	All 18V/20V Max Li-Ion DEWALT tools
Weight	0.40 / 0.45 Kg
Length x Height	110 x 45 / 110 x 48 mm

18V 4.0AH XR LI-ION BATTERY PACK
DCB182


Voltage	18V / 20V Max
Battery Capacity	4.0 Ah
Tool Compatibility	All 18V/20V Max Li-Ion DEWALT tools
Weight	0.61 Kg
Length x Height	110 x 48 mm

18V 5.0AH XR LI-ION BATTERY PACK
DCB184


Voltage	18V / 20V Max
Battery Capacity	5.0Ah
Tool Compatibility	All 18V/20V Max Li-Ion DEWALT tools
Weight	0.62 / 0.67 Kg
Length x Height	110 x 65 / 110 x 69 mm

18/54V 6.0AH BATTERY PACK (FLEXVOLT)
DCB606


Voltage	18V / 54V
Battery Capacity	6.0Ah / 2.0Ah
Tool Compatibility	All 18V & 54V Li-Ion DEWALT Tools
Weight	1.05 Kg
Length x Height	125x90 mm

18V/54V 9.0AH BATTERY PACK (FLEXVOLT)
18V/54V 12.0AH BATTERY PACK (FLEXVOLT)

DCB609

DCB612



Voltage	18V / 54V
Battery Capacity	9.0Ah / 3.0Ah
Tool Compatibility	All 18V and 54V Li-Ion DEWALT Tools
Weight	1.25 Kg
Length x Height	135x95 mm

Voltage	18V / 54V
Battery Capacity	12.0Ah / 4.0Ah
Tool Compatibility	All 18V & 54V Li-Ion DEWALT Tools
Weight	1.25 Kg
Length x Height	135x95 mm

10.8V/18V MULTI VOLT COM PACT CHARGER
18V FAST CHARGER

DCB107

DCB118



Tool Compatibility	All 12V Max & 18V Li-Ion DEWALT Tools
Weight	1.25 Kg
Charging Current	1.25A

Voltage	18V (included Flexvolt)
Charging Current	8A
Weight	0.65 Kg
Length x Height	150 x 80 mm

12V/20V MAX 2AH CHARGER

DCB1102

12V/20V MAX 4AH CHARGER

DCB1104



Voltage	20V range 2 Stage-
LED Indicators	80% and 100% 2A
Compact Charger	12V and 20V 97.8
Compatible	mm 71.8 mm 60
Length	mm 0.27 mm
Width	
Height	
Weight	

Voltage	20V range
LED Indicators	2 Stage- 80% and
Compact Charger	100% 4A 12V and
Compatible	20V 149.5 mm 114
Length	mm 66.9 mm 0.46
Width	mm
Height	
Weight	



CORDED POWER TOOLS

SDS Plus Hammers	36
SDS Max Combi Hammers.....	38
Chipping Hammers.....	38
Breakers.....	39
Other Construction Tools	43
Impact Wrenches.....	43
Drill Drivers.....	44
4" Angle Grinders.....	45
5" Angle Grinders.....	49
7" Angle Grinders	52
9" Angle Grinders.....	54

Die Grinders.....	55
Chop Saws.....	56
Other Metal Working Tools.....	57
Mitre Saws	58
Jig Saws.....	59
Circular Saws.....	60
Sanders.....	60
Other Wood Working Tools	60
Speciality Tools.....	61
Attachments.....	62

22MM 2 MODE SDS PLUS HAMMER, 2 KGS (MADE IN INDIA)**D25032B**

Power Input	710W
Max. Impact Energy	2.1 J
Impact Energy (EPTA 05/2009)	2.0 J
No Load Speed	0-1550 rpm
Blows Per Minute	0-5680 bpm
Optimum Drilling Capacity [Concrete]	4-12 mm
Max. Drilling Capacity [Concrete]	22 mm
Max. Drilling Capacity [Core bit/Wood]	50/30 mm
Operation Mode	Rotation/Hammering with rotation
Weight	2.5 Kg
Length x Height	330 x 210 mm
Vibration Level	13.6 m/s ²

**22MM 3 MODE SDS PLUS HAMMER, 2 KGS (MADE IN INDIA)****D25033K**

Power Input	710W
Max. Impact Energy	2.1 J
Impact Energy (EPTA 05/2009)	2.0 J
No Load Speed	0-1550 rpm
Blows Per Minute	0-5680 bpm
Optimum Drilling Capacity [Concrete]	4-12 mm
Max. Drilling Capacity [Concrete]	22 mm
Max. Drilling Capacity [Core bit/Wood]	50/30 mm
Operation Mode	Hammering/Rotation / Hammering with rotation
Weight	2.5 Kg
Length x Height	330 x 210 mm
Vibration Level	13.6 m/s ²

**26MM 3 MODE COMBINATION HAMMER, 2 KGS (MADE IN INDIA)****D25133K**

Power Input	800W
Max. Impact Energy	2.8 J
Impact Energy (EPTA 05/2009)	2.6 J
No Load Speed	0-1500 rpm
Blows Per Minute	0-5500 bpm
Optimum Drilling Capacity [Concrete]	4-14 mm
Max. Drilling Capacity [Concrete]	26 mm
Max. Drilling Capacity [Core bit/Wood]	50/30 mm
Operation Mode	Hammering/Rotation / Hammering with rotation
Weight	2.6 Kg
Length x Height	335 x 210 mm
Vibration Level	15.4 m/s ²



28MM 3 MODE SDS PLUS COMBINATION HAMMER, 2 KGS**D25143K**

Power Input	900W
Max. Impact Energy	3.2 J
Impact Energy (EPTA 05/2009)	3.0 J
No Load Speed	0-1450 rpm
Blows Per Minute	0-5350 bpm
Optimum Drilling Capacity [Concrete]	4-18 mm
Max. Drilling Capacity [Concrete]	28 mm
Max. Drilling Capacity [Core bit/Wood]	65/100 mm
Operation Mode	Hammering/Rotation / Hammering with rotation
Weight	3.0 Kg
Length x Height	340 x 210 mm
Vibration Level	14.9 m/s ²

**30MM 3 MODE SDS PLUS COMBINATION HAMMER, 3KGS****D25333K**

Power Input	950W
Max. Impact Energy	4.2 J
Impact Energy (EPTA 05/2009)	3.5 J
No Load Speed	0-1150 rpm
Blows Per Minute	0-5200 bpm
Optimum Drilling Capacity [Concrete]	6-20 mm
Max. Drilling Capacity [Concrete]	30 mm
Max. Drilling Capacity [Core bit/Wood]	65/100 mm
Operation Mode	Hammering/Rotation / Hammering with rotation
Weight	3.7 Kg
Length x Height	355 x 250 mm
Vibration Level	6.9 m/s ²

**32MM 3 MODE SDS PLUS COMBINATION HAMMER, 4KGS****D25413K**

Power Input	1000W
Max. Impact Energy	4.9 J
Impact Energy (EPTA 05/2009)	4.2 J
No Load Speed	0-820 rpm
Blows Per Minute	0-4700 bpm
Optimum Drilling Capacity [Concrete]	6-22 mm
Max. Drilling Capacity [Concrete]	32 mm
Max. Drilling Capacity [Core bit/Wood]	65/100 mm
Operation Mode	Hammering/Rotation / Hammering with rotation
Weight	4.2 Kg
Length x Height	370 x 250 mm
Vibration Level	8.2 m/s ²



40MM SDS MAX COMBINATION HAMMER, 5 KGS

D25481K

Power Input	1050W
Max. Impact Energy	7.3 J
Impact Energy (EPTA 05/2009)	6.1 J
No Load Speed	540 rpm
Blows Per Minute	3150 bpm
Optimum Drilling Capacity [Concrete]	6-30 mm
Max. Drilling Capacity [Concrete]	40 mm
Max. Drilling Capacity [Core bit]	100 mm
Operation Mode	Hammering/Rotation / Hammering with rotation
Weight	5.9 Kg
Length x Height	453 x 263 mm
Vibration Level	9.4 m/s²



5KG SDS-MAX CHIPPING HAMMER

D25810K

Power Output	1050W
Max. Impact Energy	8.5 J
Impact Energy (EPTA 05/2009)	7.1 J
Blows Per Minute	3150 bpm
Chisel Positions	18
Weight	5.6 Kg
Length x Height	462 mm x 263 mm
Vibration Level	8.5 m/s²



5KG HEX 17MM CHIPPING HAMMER

D25811K

Power Output	1100W
Max. Impact Energy	8.5 J
Impact Energy (EPTA 05/2009)	7.1 J
Blows Per Minute	3150 bpm
Chisel Positions	18
Weight	5.7 Kg
Length x Height	477 mm x 263 mm
Vibration Level	8.5 m/s ²



1600W 10KG L SHAPED DEMOLITION HAMMER (MADE IN INDIA)

D25881K

Power Output	1600 W
Single Impact Energy (EPTA)	17.5 J
No-Load Beats Per Minute	1060 - 2160 bpm
Chisel Positions	12
Weight	10.4 Kg
Size (Length x Height)	559 mm x 282 mm
Vibration Level	14.9 m/s ²



1550W 10KG SDS MAX DEMOLITION HAMMER, IN-LINE

D25901K

Power Input	1550W
Max. Impact Energy	20.7 J
Impact Energy (EPTA 05/2009)	19 J
Blows Per Minute	1050 - 2100 bpm
Chisel Positions	12
Weight	10.9 Kg
Length x Height	690 x 250 mm
Vibration Level	8.0 m/s ²




1600W 12KG SDS MAX DEMOLITION HAMMER**D25951K**

Power Output	1600W
Max. Impact Energy	30.1 J
Impact Energy (EPTA 05/2009)	24 J
Blows Per Minute	1621 bpm
Chisel Positions	12
Weight	13.6 Kg
Length x Height	750 mm x 250 mm
Vibration Level	8.8 m/s ²

**1700W 12KG SDS MAX BRUSHLESS DEMOLITION HAMMER****D25911K**

Power Output	1700 W
Impact Energy (EPTA)	27 J
Beats Per Minute	810 - 1620 bpm
Chisel Positions	12
Weight	12.7 Kg
Length x Height	765 mm x 296 mm
Vibration Level	6 m/s ²

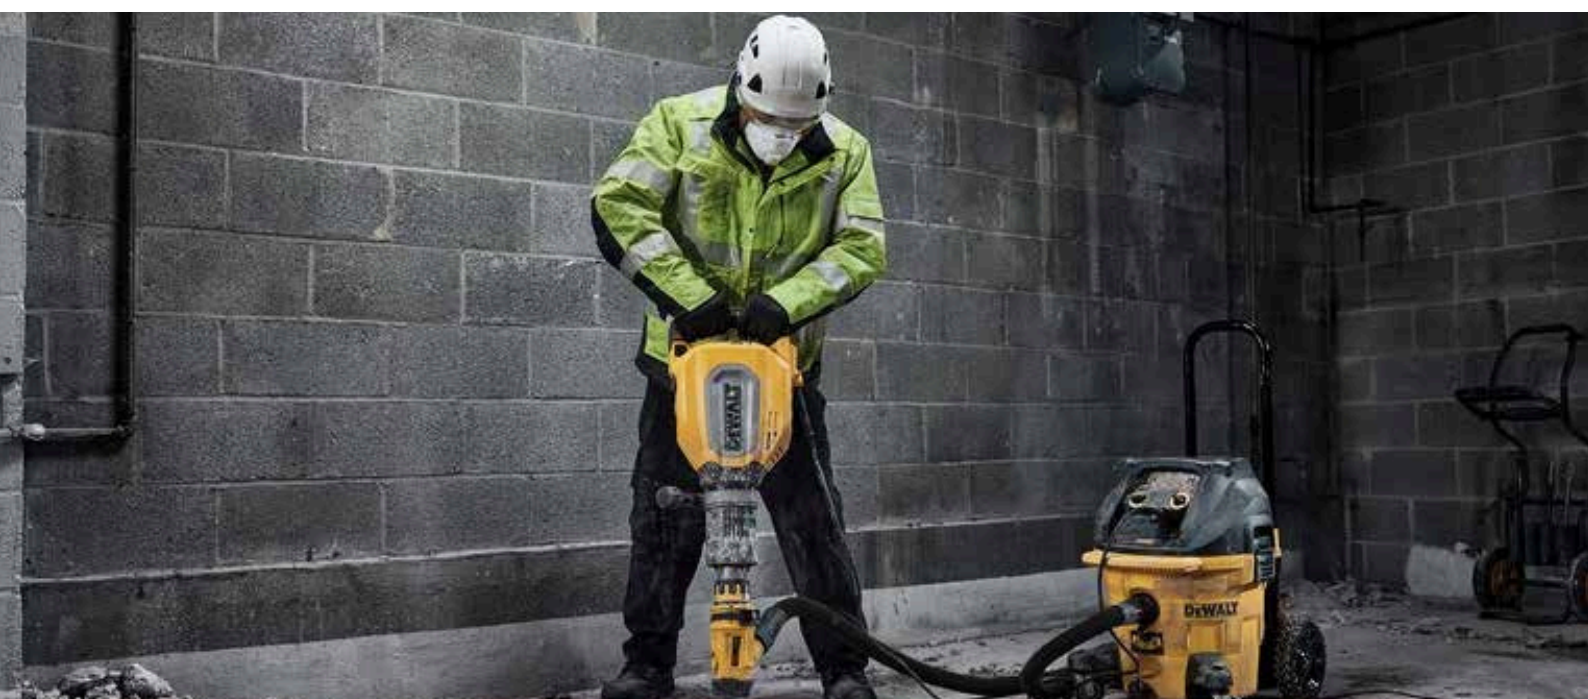

1600W 16KG DEMOLITION HAMMER

D25961K

Power Output	1600W
Max. Impact Energy	38 J
Impact Energy (EPTA 05/2009)	35 J
Blows Per Minute	1450 bpm
Chisel Positions	12
Weight	16.9 Kg
Length x Height	760 mm x 260 mm
Vibration Level	6.8 m/s ²



2100W 30KG DEMOLITION BREAKER

D25981K

Power Output	2100W
Max. Impact Energy	72 J
Impact Energy (EPTA 05/2009)	62 J
Blows Per Minute	960 bpm
Chisel Positions	12
Weight	31 Kg
Length x Height	780 mm x 620 mm
Vibration Level	4.8 m/s ²



1270W 110MM TILE SAW

DW862

Power Input	1270W 110
Blade Diameter	mm 20 mm
Blade Bore Diameter	13500 rpm
No Load Speed	34 mm 3.0
Depth of Cut at 90°	Kg 252 x
Weight	166 mm
Length x Height	



1700W 430MM ALLIGATOR SAW

DWE397

Power Input	1700W
No Load Stroke Rate	3000 spm
Stroke Length	40 mm
Blade Length	430 mm
Blade Stop	0.2s
Weight	5.5 Kg
Length x Height	918 x 219 mm



1/2" HEAVY DUTY IMPACT WRENCH, 440NM

DW292

Power Input	710W 440
Max. Torque	Nm 2200
No Load Speed	rpm 2700
Impacts Per Minute	ipm 3.2 Kg
Weight	292 x 216
Length x Height	mm

* Till Stocks Last



10MM VSR DRILL, 550W (MADE IN INDIA)**DWD014**

Power Input	550W	10
Chuck Capacity	mm	0-2800
No Load Speed	rpm	10 mm
Max. Drilling Capacity [Wood]	28 mm	
Max. Drilling Capacity [Metal]	1.3 Kg	
Weight	215 x	170
Length x Height	mm	

**10MM ROTARY DRILL WITH KEYLESS CHUCK, 701W****DWD112S**

Power Input	Chuck	701W	10
Capacity	No Load	mm	0-2500
Speed	Max. Torque	rpm	10.9
Max. Drilling Capacity [Wood]	Max. Drilling Capacity [Metal]	Nm	25 mm
		10 mm	
		1.8 Kg	
Weight	230 x	190	
Length x Height	mm		

**10MM HAMMER DRILL, 550W (MADE IN INDIA)****DWD022**

Power Input	550W	10
Capacity	mm	0-2800
No Load Speed	min-1	0-
No Load Impact	47600 min-1	
Max. Drilling Range [Masonry]	13 mm	10
Max. Drilling Range [Steel]	mm	25 mm
Max. Drilling Range [Wood]	1.4 Kg	
Weight		



13MM IMPACT DRILL, 750W (MADE IN INDIA)

DWD024

Power	Input	Chuck	750W
Capacity	No Load	Speed	13 mm
Blows	Per Minute	Max.	0-2800 rpm
Drilling	Capacity	[Wood]	0-47600 bpm
Max.	Drilling	Capacity	25 mm
[Metal]	Max.	Drilling	13 mm
Capacity	[Concrete]		16 mm
Weight	Length x Height		1.82 Kg
			255 x 180 mm



750W, 100MM ANGLE GRINDER (MADE IN INDIA)

DW810

Power	Input	750 W
Disc	Diameter	100 mm
Switch	Type	Toggle
No Load	Speed	11000 rpm
Spindle	Thread	M10
Weight		1.8 Kg
Length	x Height	270 x 80 mm



4" SAG SLIDE SWITCH WITH SIDE HANDLE (MADE IN INDIA)

DWE750S

Power	Input	750 W
Disc	Diameter	100 mm
Switch	Type	Slide
No Load	Speed	12000 rpm
Spindle	Thread	M10
Weight		1.64 Kg
Length	x Height	345 x 96 mm



NEW

800W 100MM LOW VOLTAGE SAG WITH PADDLE SWITCH (MADE IN INDIA)

DWE4002


Power Input	800 W
Disc Diameter	100 mm
Switch Type	Paddle
No Load Speed	11800 rpm
Spindle Thread	M10
Weight	2.05 Kg



850W, 100MM ANGLE GRINDER (MADE IN INDIA)

DW801

Power Input	850 W
Disc Diameter	100 mm
Switch Type	Toggle
No Load Speed	11000 rpm
Spindle Thread	M10
Weight	1.9Kg
Length x Height	270 x 80 mm

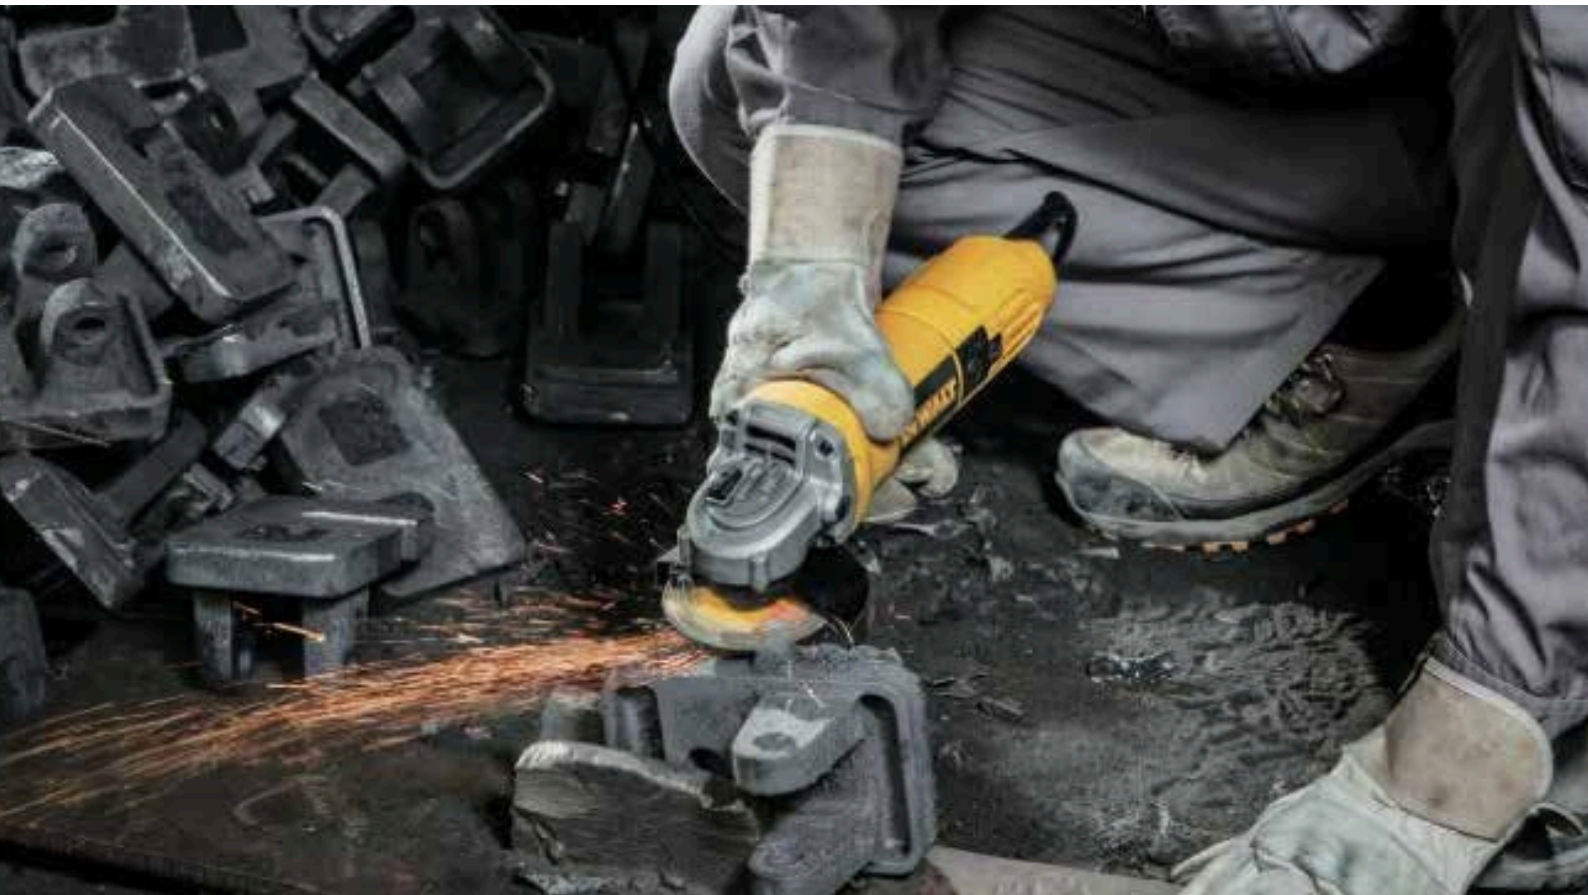

850W, 100MM ANGLE GRINDER WITH SLIDE SWITCH (MADE IN INDIA)
DW802

Power Input	850 W
Disc Diameter	100 mm
Switch Type	Silde
No Load Speed	11000 rpm
Spindle Thread	M10
Weight	1.8 Kg
Length x Height	270 x 80 mm



850W 100MM SAG WITH PADDLE SWITCH (MADE IN INDIA)
DWE8200PL

Power Input	850 W
Disc Diameter	100 mm
Switch Type	Paddle
No Load Speed	12000 rpm
Spindle Thread	M10
Weight	1.8 Kg
Length x Height	270 mm x 80 mm



1000W, 100MM ANGLE GRINDER (MADE IN INDIA)

DW803

Power Input	1000 W
Disc Diameter	100 mm
Switch Type	Toggle
No Load Speed	12000 rpm
Spindle Thread	M10
Weight	1.9 Kg
Length x Height	270 x 80 mm



1010W, 100MM ANGLE GRINDER WITH DUST EJECTION TECHNOLOGY (MADE IN INDIA)

DWE8300S

Power Input	1010 W
No-Load/Rated Speed	11000 min-1
Wheel Diameter	100 mm
Spindle Diame	M10
Spindle Length	18.5 mm
Switch Style	Silde
eight	1.85 Kg



950W, 100MM ANGLE GRINDER- VAR SPEED, NVR, SOFT START

DWE4118

Power Input	950W
Disc Diameter	100 mm
Switch Type	Slide
No Load Speed	3000–11000 rpm
Spindle Thread	M14
Weight	2 Kg
Length x Height	270 x 80 mm



950W, 125MM ANGLE GRINDER- VAR SPEED, NVR, SOFT START (MADE IN INDIA)

DWE4119

Power Input	950W
Disc Diameter	125 mm
Switch Type	Slide
No Load Speed	3000–11000 rpm
Spindle Thread	M14
Weight	1.8 Kg
Length x Height	270 x 80 mm



1400W 125MM ANGLE GRINDER RAT-TAIL DESIGN (MADE IN INDIA)

DW831

Power Input	1400W
Disc Diameter	125 mm
Switch Type	Trigger
No Load Speed	11000 rpm
Spindle Thread	M14
Weight	3.1 Kg
Length x Height	290 x 80 mm



METAL WORKING TOOLS - 4" ANGLE GRINDERS

METAL WORKING TOOLS - 5" ANGLE GRINDERS

950W, 125MM ANGLE GRINDER (MADE IN INDIA)

DWE4115

Power Input	950W
Disc Diameter	125 mm
Switch Type	Slide
No Load Speed	12000 rpm
Spindle Thread	M14
Weight	1.8 Kg - RATALE
Length x Height	2 70 x 80 mm



1100W 125MM ANGLE GRINDER (MADE IN INDIA)

DWE4215

Power Input	1200W
Disc Diameter	125 mm
Switch Type	Slide
No Load Speed	11500 rpm
Spindle Thread	M14
Weight	1.9 Kg
Length x Height	285 x 80 mm

DES Technology



1400W 125MM ANGLE GRINDER (MADE IN INDIA)

DWE4235

Power Input	1400W
Disc	125 mm
Diameter	Slide
Switch Type	11500 rpm
No Load	M14
Speed	2.1 Kg
Spindle	2 85 x 80 mm

Thread

Weight

Length x

Height

DES

Technology



1400W 125MM SAG WITH PADDLE SWITCH & DES (MADE IN INDIA)

DWE4233


Power Input	1400 W
Disc Diameter	125 mm
Switch Type	Padd
No Load Speed	11500 RPM
Spindle Thread	M14
Weight	1.85 Kg



1400W 125MM SAG WITH SLIDE SWITCH, DES & NO-VOLT RELEASE (MADE IN INDIA)

DWE4237

Power Input	1400 W
Disc Diameter	125 mm
Switch Type	Slide Switch
No Load Speed	11500 rpm
Spindle Thread	M14
Weight	1.85 Kg

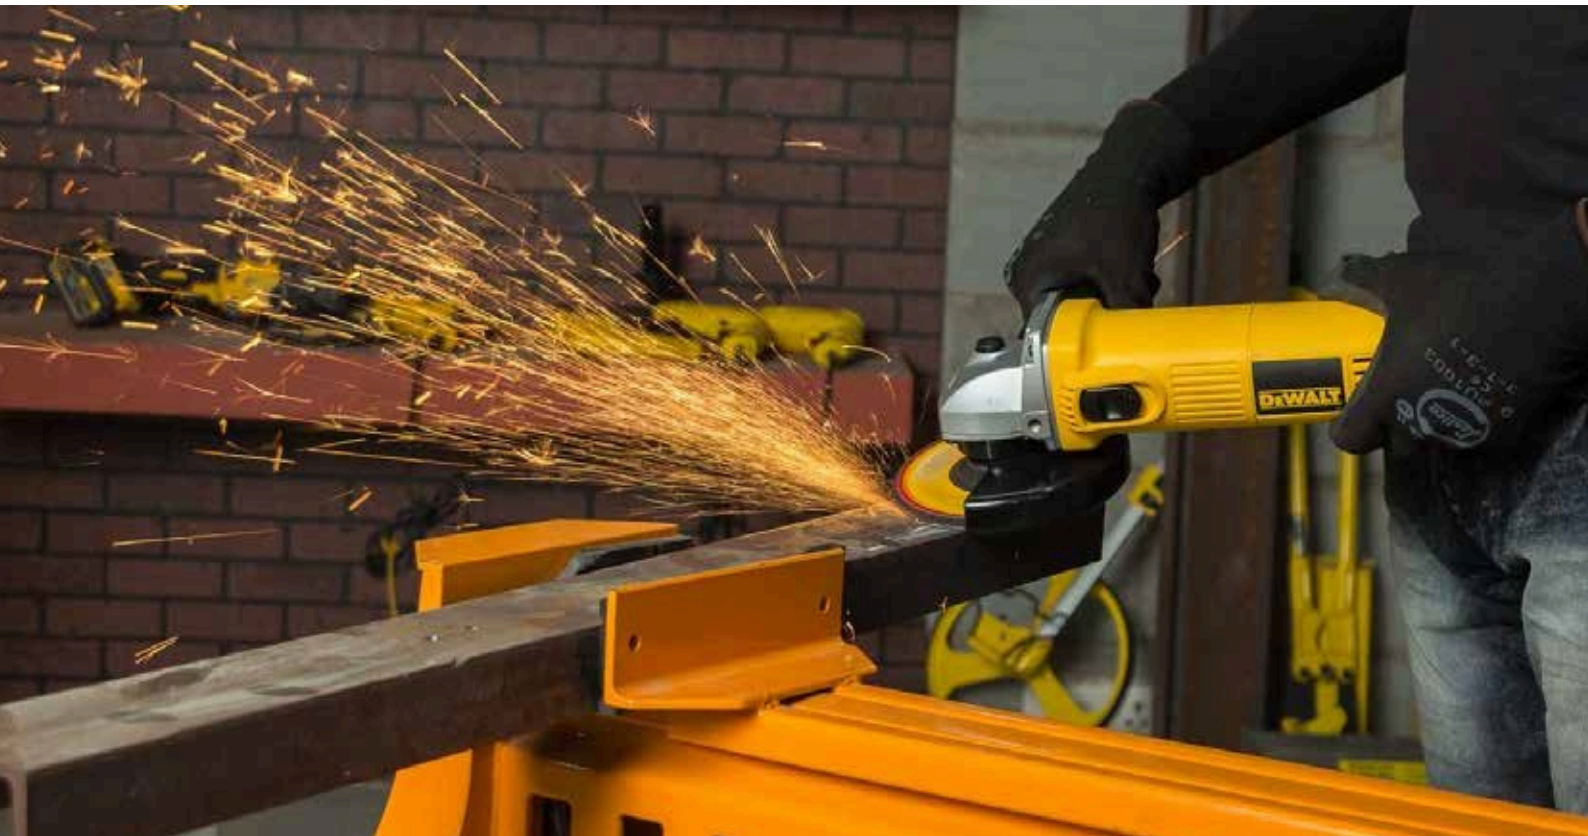

2200W, 180MM LAG (MADE IN INDIA)

DWE493

Power Input	2200W
Disc Diameter	180 mm
Switch Type	Trigger
No Load Speed	8500 rpm
Spindle Thread	M14
Weight	5.1 Kg
Length x Height	484 x 112 mm



2200W 180MM LOW VOLTAGE LAG (MADE IN INDIA)

DWE493-B4

Power Input	2200W
Disc Diameter	180 mm
Switch Type	Trigger
No Load Speed	8500 rpm
Spindle Thread	M14
Weight	5.2 Kg
Length x Height	484 x 112 mm



2600W, 180MM LAG (MADE IN INDIA)

DWE497

Power Input	2600W
Disc Diameter	180 mm
Switch Type	Trigger
No Load Speed	8500 rpm
Spindle Thread	M14
Weight	5.4 Kg
Length x Height	490 x 145 mm



2200W, 180MM ANGLE GRINDER (MADE IN INDIA)

D28413

Power Input	2200W
Disc Diameter	180 mm
Swttch Type	Paddle
No Load Speed	8500 rpm
Spindle Thread	M14
Weight	4.7 Kg
Length x Height	520 x 145 mm



2600W, 180MM LAG WITH PERFORM & PROTECT (MADE IN INDIA)

DWE4597

Power Input	2600W
Disc Diameter	180 mm
Switch Type	Paddle
No Load Speed	8500 rpm
Spindle Thread	M14
OverLoad Protection	Yes
Weight	5.8 Kg
Length x Height	520 x 151 mm



2200W, 230MM LAG (MADE IN INDIA)

DWE492

Power Input	2200W
Disc Diameter	230 mm
Switch Type	Trigger
No Load Speed	6600 rpm
Spindle Thread	M14
Weight	5.2 Kg
Length x Height	490 x 151 mm



2 600W, 230MM LAG (MADE IN INDIA)

DWE496

Power Input	2600W
Disc Diameter	230 mm
Switch Type	Trigger
No Load Speed	6500 rpm
Spindle Thread	M14
Weight	5.4 Kg
Length x Height	490 x 145 mm



2600W, 230MM LAG WITH PERFORM & PROTECT (MADE IN INDIA)

DWE4579

Power Input	2600W
Disc Diameter	230 mm
Switch Type	Paddle
No Load Speed	6500 rpm
Spindle Thread	M14
OverLoad Protection	Yes
Weight	5.9 Kg
Length x Height	520 x 145 mm



450W, 6MM HEAVY DUTY DIE GRINDER WITH PADDLE SWITCH (MADE IN INDIA)

DWE4887N

Power	Input	450W	6
Collet	Size	mm	
Switch	Type No	Paddle	
Load	Speed	25000	
Max.	Wheel	rpm	38
Diameter		mm	M15
Spindle	Thread	1.6	Kg
Weight	Length	356	mm



450W, 6MM SLIDE SWITCH DIE GRINDER (WITH LOCK-ON) (MADE IN INDIA)

DWE4884

Power	Input	450W	6
Collet	Size	mm	
Switch	Type No	Slide	
Load	Speed	25000	
Max.	Wheel	rpm	38
Diameter		mm	M15
Spindle	Thread	1.6	Kg
Weight	Length	356	mm



1300W BRUSHLESS VARIABLE SPEED DIE GRINDER

DWE4997

Power	Input	1300	W
No Load	Speed	7500-25000	min-1
Collet	Size	6	mm
Weight		2.4	Kg



355MM HEAVY DUTY CHOP SAW (MADE IN INDIA)

DW871

Voltage	
Power Input	220-240V
No Load Speed	2200W
Min. peripheral speed cutting disc	3800 min-1
	72 m/s
Disc Diameter	355 mm
Disc Bore	25.4 mm
Disc Body Thickness	3.0 mm
Thread Size of Spindle	M10

Cross-Cutting Capacity at 90°

Circular	125	mm
Square	120	x 120
Rectangular	mm	115 x
Angular	160	mm

Weight	140	x 140
	mm	
	18	Kg



355MM INDUSTRIAL CHOP SAW (MADE IN INDIA)

D28730

Voltage	
Type	230V
Power Input	20
No Load Speed	2300W
Min. peripheral speed cutting disc	4200 min-1
	80 m/s
Disc Diameter	355 mm
Disc Bore	25.4 mm
Disc Body Thickness	3.0 mm
Thread Size of Spindle	M10
Type of Cutting Disc	Straight, non-recessed

Cross-Cutting Capacity at 90°

Circular	125	mm
Square	115	x 115
Rectangular	mm	115 x
Angular	130	mm

Cross-Cutting Capacity at 45°

Circular	115	mm
Square	98	x 98 mm
Rectangular	95	x 105 mm
Angular	105	x 105 mm

Weight	16	Kg
--------	----	----



355MM HEAVY DUTY CHOP SAW (MADE IN INDIA)

D28870

Voltage	220-240V
Power Input	2200W
No Load Speed	3800 min-1
Min. peripheral speed cutting disc	80 m/s
Disc Diameter	355 mm
Disc Bore	25.4 mm
Disc Body Thickness	3.1 mm
Type of Cutting Disc	Straight, non-recessed
Cross-Cutting Capacity at 90°	
Circular	130 mm
Square	120 x 120 mm
Rectangular	100 x 200 mm
Angular	140 x 140 mm
Cross-Cutting Capacity at 45°	
Circular	130 mm
Square	110 x 110 mm
Rectangular	100 x 140 mm
Angular	120 x 120 mm
Weight	18.5 Kg



1200W 50MM 2 SPEED MAGNETIC DRILL PRESS

DWE1622K

Power Input		Speed	Settings	
No Load	Speed	Cutter		1200W 2 speed
Holder Max.	Cutting	Depth		300/450 rpm 19 mm
with Cutters	Max.	Cutting		Weldon shank (3/4")
Diameter with Cutters	Drill			50 mm 50 mm 317 kg
Point Pressure	Clamping			3800 N 147 mm 14.55
Force Stroke	Length	Weight		Kg 180 x 84 mm
Magnetic Base Dimensions				



7" CORDED POLISHER

DWP849X

Power Input	1250W
No Load Speed	0-600/0-3500 rpm
Spindle Thread	M14
Weight	3.0 Kg
Length x Height	480 x 135 mm



150MM 373W BENCH GRINDER

DW752R

Power Input	373W
No Load Speed	2950 rpm
Wheel Diameter	152 mm
Wheel Thickness	15-17 mm
Bore Diameter	12.7-12.9
Grinder Wheel Speed	35m/s
Weight	13.8 Kg
Length x Height	310 x 215 mm



254MM COMPOUND MITRE SAW + 80T ALU BLADE

DW714

Voltage	220-240V
Type	1
Power Input	1650W
Blade Diameter	254 mm
Blade Thickness	3.2 mm
Bore Diameter	25.4 mm
Max. Blade Speed	4600 min-1
Max. Cross-cut Capacity 90°	130 mm
Max. Mitre Capacity 45°	91 mm
Max. Depth of Cut 90°	89 mm
Max. Depth of Bevel Cross-cut 45°	50 mm
Mitre (Max. Positions)	Left 47° Right 52°
Bevel (Max. Positions)	Left 45° Right 0°



305MM SINGLE BEVEL MITRE SAW

DWS715

Power Input	Blade Speed	1600W
Blade Diameter	Blade Bore	4000 rpm
Diameter	Bevel Capacity	305 mm
Mitre Capacity	[right/left]	25.4 mm
Cutting Capacity at 90°/90°		48/-3 °
(WxH) Cutting Capacity at 90°/45°	(WxH) Cutting	45 / 45 °
Capacity at 45°/90° (WxH)		203 x 72 mm
Max. Cutting Capacity at 45°/45°	Max. Depth of Cut	203 x 47 mm
[Saws] Weight	Length x	142 x 72 mm
Height		99 mm
		19 Kg
		770 x 396 mm



305MM 1675W SLIDE MITRE SAW - WITH VARIABLE SPEED

DWS780

Power Input	Blade Speed	1675W	1900 -
Blade Diameter	Blade Bore	3800 rpm	305
Diameter	Bevel Capacity	mm	30 mm
Mitre Capacity	[right/left]	49°	60 / 50°
Cutting Capacity at 90°/90°		345 x 76 mm	
(WxH) Cutting Capacity at 90°/45°	(WxH)	244 x 76 mm	
Cutting Capacity at 45°/90°	(WxH)	268 x 63 mm	
Max. Cutting Capacity at 45°/45°	Max. Depth of Cut	170 mm	24.8
[Saws] Weight	Length x Height	Kg	770 x 396 mm



500W JIGSAW, 800-3100SPM, 20MM STROKE LENGTH, 2.7KGS

DWE349

Power Input	500W	800-
No Load Stroke Rate	3100	spm
Stroke Length	20 mm	45
Bevel Capacity	deg	85 mm
Max. Depth of Cut (Wood)	10 mm	20
Max. Depth of Cut (Steel)	mm	Yes 3
Max. Depth of Cut (Non Ferrous Metal)	Kg	230 X
Keyless Blade Change	200 mm	
Weight		
Length x Height		



701W JIGSAW, 0-3100SPM, 26MM STROKE LENGTH, 2.6KGS

DW331K

Power Input	701W	0-
No Load Stroke Rate	3100	spm
Stroke Length	26 mm	45 °
Bevel Capacity	130 mm	12
Max. Depth of Cut (Wood)	mm	30 mm
Max. Depth of Cut (Steel)	Yes	2.6 Kg
Max. Depth of Cut (Non Ferrous Metal)	mm	150 x 210
Keyless Blade Change	mm	
Weight		
Length x Height		



1500W 184MM CIRCULAR SAW

DWE5615

Voltage	Power	220 - 240V
Input	No-Load	1500W
Speed		5500 min-1
Blade Diameter		184 mm
Maximum depth of Cut at		65 mm
90°		46 mm
Blade bore		20 mm
Bevel angle adjustment		5°
Weight		4 Kg



1/4" SHEET ORBITAL SANDER

DWE6411

Power Input	280W
Orbits Per Minute	14,000 opm
Orbit Size	1.6 mm 140
Paper Size	x 115 mm
Pad Size	108 x 115
Weight	mm 1.28 Kg
Length x Height	160 x 135 mm



550W PORTABLE PLANER

D26676

Power	Input	550W
No	Load	17000 rpm
Speed	Max.	1.5 mm
DepthofCut		10 mm
Rebating		82 mm
Depth Planer		309 mm
Width Shoe		54 mm
Length Drum		2.72 Kg
Diameter		290 X 180 mm
Weigt	Length	
x Height		



1800W PORTABLE THICKNESS PLANER

DW733

Power Input	1800W
No Load Speed	10000 rpm
Max. Capacity	64-315 mm (Width)
Max. Depth of Cut	3.2 mm
Max. Planing Depth	2 mm
Max. Thicknesser Capacity	152 mm (Height)
Feed Rate	8 m/min
Overload Protection	Yes
Weight	33.6 Kg
Length x Height	520 x 445 mm



250mm 2000W LIGHTWEIGHT TABLE SAW

DWE7492

Power Input Blade Speed	2000W
Blade Diameter Blade Bore	4800 rpm
Diameter Bevel Capacity -	250 mm 30
Max. Ripping Capacity	mm 3 to 48
[right / left] Max. Depth of	° 825 x 558
Cut at 90° Max. Depth of	mm 77 mm
Cut at 45° Table Size	55 mm
Weight Depth Length x	680x650
Height	mm 26.5 Kg
	742 mm
	577 x 425
	mm



2000W, HEAT GUN WITH LCD DISPLAY (+/- 10°C)

D26414

Power Input	2000W
Operating Temperature	50 - 600 °C
Air Flow	650 l/min
Weight	0.85 Kg
Length x Height	265 x 210 mm



800W HEAVY DUTY INDUSTRIAL BLOWER
DWB800

Power Input	800W 0 -
Speed	16000 rpm
Air Volume	4.5 m3/min
Suction	2.5 m3/min
Weight	1.8 Kg



HEAVY DUTY MITER SAW STAND
DWX723



125MM SURFACE GRINDING SHROUD
DWE46150



Compact Length	1765 mm 3835
Extended Length	mm * Stand only.
Include Disclaimer	Tool only for illustration

Product Fitment	All 115 / 125 mm grinders
Max. Disc Diameter	125 mm
Accessories Accepted	Diamond Cups
Weight	0.3 Kg



DEWALT®

100
YEARS

DWE4002



    @ DewaltToolsIndia

STANLEY BLACK & DECKER INDIA PRIVATE LIMITED

28 Akemps, 3rd Main, 1st Cross, Ashwini Layout,
Koramangala, Intermediate Ring Road, Bangalore - 560047

 sbd-customercommunications@sbdinc.com

Customer Support # 1800 203 0644

 +91 9606055835

SMART



WWW.DEWALT.CO

CAT-TR0002



Pneumatic Tools

Let's Get In Touch

 **Contact Us** +91 9811579961

+91 88105 53875

+91 7011218105

011-47002673

 **Email Us**

staplespackagingsolutions@gmail.com

 **Office Location**

Plot 60, Shop No.4, Furniture Block, Kirti
Nagar, New Delhi- 110015



VISIT US at: www.spspneumatictools.com