




Features for SA-22015T8 series :

- Especially for suspending pneumatic tool. By combining with Hose Reel and Spring Balancer, it achieves neat and orderly production line for enhancing the working efficiency.
- The installation is fast and convenient with 360° install hook. In addition, anti-falling steel wire mounting holes are provided, which must be installed to avoid the failure of the original mounting location.
- Plastic housing is aesthetics and easy cleaning. Smooth braided hose provide easy down-pull stroke. Further, a rubber damper also can stop hose at a fixed height.
- Adopting 8.0 mm inner diameter hose to provide enough air flow to air tool and equipment.

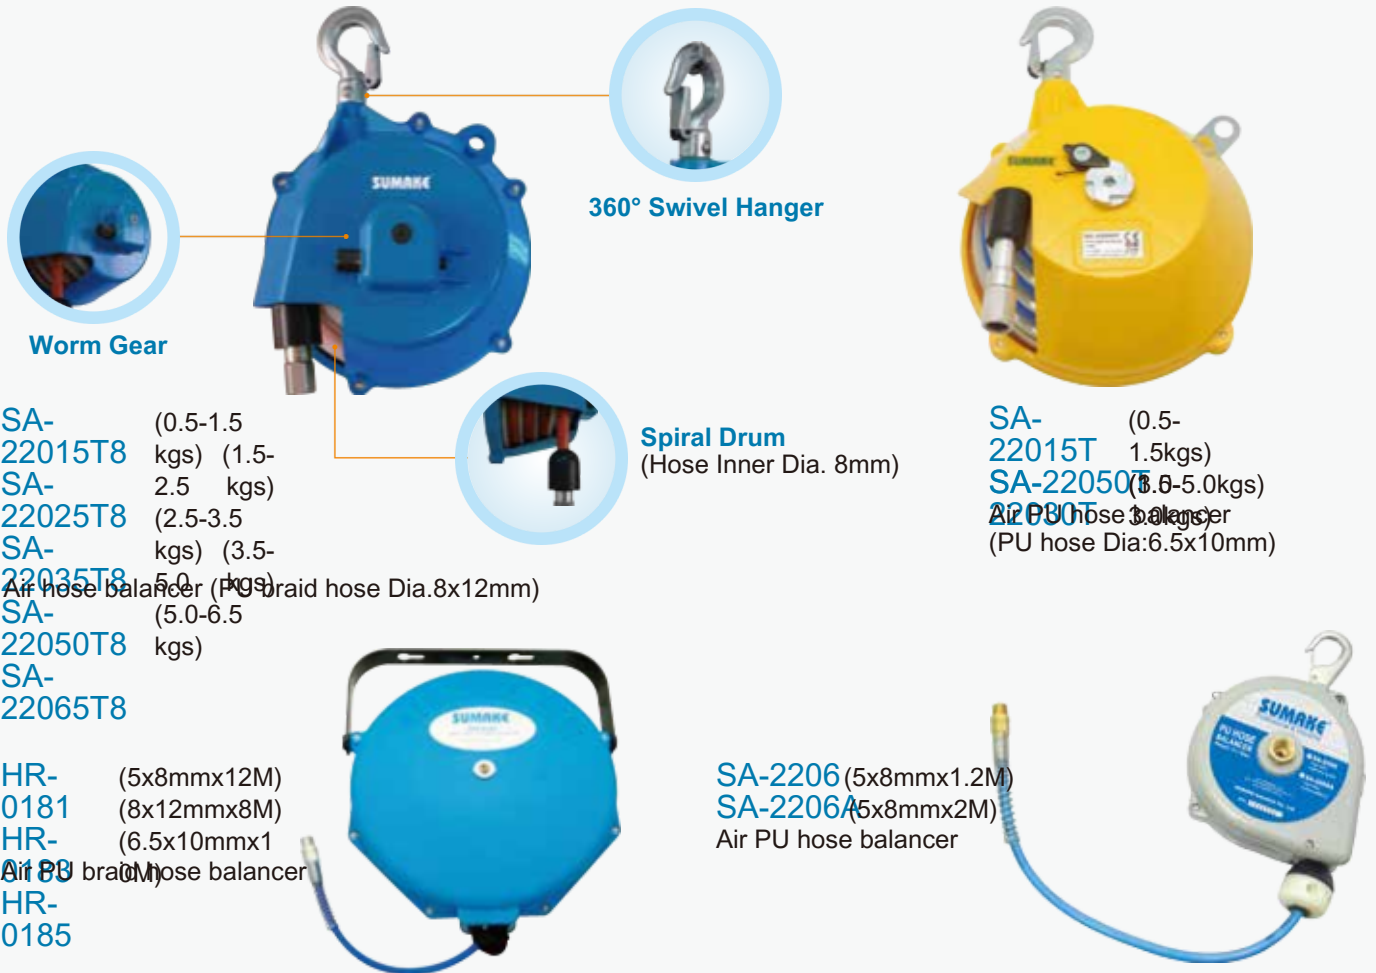

Model No.	Capacity (kg)	Net Weight (kg)	Travel (m)	Hose Type	Hose Dia (mm)	Air Inlet	Packing Pcs/Ctn/G.W./Cuft (kgs)
SA-22015T8	0.5 - 1.5	2.	1.	PU	8 x 12	3/8	6Pcs/Ctn/14.8/2.5'
SA-22025T8	- 2.5	2.	1.	PU	x 12	3/8	6Pcs/Ctn/15.4/2.5'
SA-22035T8	2.5 - 3.5	3.	3	Braid	8 x 12	"	6Pcs/Ctn/16/2.5'
SA-22050T8	3.5 - 5.0	2.	1.	PU	12	3/8	6Pcs/Ctn/16/2.5'
SA-22065T8	5.0 - 6.5	4.	3	Braid	6.5 x 10	"	6Pcs/Ctn/16/2.5'
SA-22015T	0.5 - 1.5	2.	1.	PU	8 x 12	3/8	6Pcs/Ctn/14.8/2.5'
SA-22025T	- 2.5	2.	1.	PU	x 12	3/8	6Pcs/Ctn/15.4/2.5'
SA-22030T	2.5 - 3.5	3.	3	Braid	8 x 12	"	6Pcs/Ctn/16/2.5'
SA-22050T	3.5 - 5.0	2.	1.	PU	12	3/8	6Pcs/Ctn/16/2.5'
SA-22065T	5.0 - 6.5	4.	3	Braid	6.5 x 10	"	6Pcs/Ctn/16/2.5'
HR-0181	5x8mmx12M						
HR-22030T	8x12mmx8M						
HR-22050T	6.5x10mmx12M						
HR-0185							
SA-2206	5x8mmx1.2M						
SA-2206A	5x8mmx2M						

Model No.	Hose Size (mm) - I.D. - O.D.	Max. Working Pressure (psi / bar)	Burst Pressure (psi / bar)	Hose Length (ft / m)	Hose Type	Working Temperature (°C)	Hose Color	Case Color	Packing Pcs/Ctn/G.W./Cuft (kgs)
SA-22015T	3.0 - 3.5	8	4	12	P	-5 ~ +60	Blue	Blue	6Pcs/Ctn/14.8/2.5'
SA-22025T	5 - 5.0	14	8	12	P	-5 ~ +60	Blue	Blue	6Pcs/Ctn/15.4/2.5'
SA-22030T	8	14	8	12	P	-5 ~ +60	Blue	Blue	6Pcs/Ctn/16/2.5'
SA-22050T	6.5	14	8	12	P	-5 ~ +60	Blue	Blue	6Pcs/Ctn/16/2.5'
SA-22065T	5	7	4	1.2	U	-5 ~ +60	Grey	Grey	5Pcs/Ctn/16/2.5'
HR-0185	5	7	8	6.6	2	-5 ~ +60	Blue	Grey	5Pcs/Ctn/16/2.5'
SA-2206						-5 ~ +60	Blue		10Pcs/Ctn/11/1.4'
SA-2206A						-5 ~ +60	Blue		



Professional Air Hose Reel



HR121008 (6.5x10mmx8M)
HR121010 (6.5x10mmx10M)
HR121012 (6.5x10mmx12M)
HR121208 (8x12mmx8M)

Plastic Case



HR021030 (6.5x10.0mmx30M)
HR021050 (6.5x10.0mmx50M)
HR021230 (8.0x12.0mmx30M)
HR021240 (8.0x12.0mmx40M)



HR041010 (6.5x10mmx10M)
HR041015 (6.5x10mmx15M)
HR041210 (8.0x12mmx10M)
HR041450 (10.0x15mmx50M)
HR041212 (8.0x12mmx12M)
HR041215 (8.0x12mmx15M)



HR021020 (6.5x10.0mmx20M)
HR021030 (6.5x10.0mmx30M)
HR021050 (6.5x10.0mmx50M)
HR021230 (8.0x12.0mmx30M)
HR021240 (8.0x12.0mmx40M)



HR300715 (6.5x10mmx15M)
HR300810 (8x12mmx10M)
HR300812 (8x12mmx12M)
HR300815 (8x12mmx15M)
HR300820 (9.5x13.5mmx20M)
HR301015 (9.5x13.5mmx15M)
HR310818 (8x12mmx18M)
HR310819 (8x12mmx19M)
HR311019 (9.5x13.5mmx18M)
HR311020 (9.5x13.5mmx20M)
HR311070 (6.5x10mmx70M)

18
HR310720

Model No.	Hose Size (mm)		Max. Working Pressure		Burst Pressure		Hose Length		Hose Type	Working Temperature (°C)	Hose Color	Case Color	Packing Pcs/Ctn/G.W./Ctn (kgs)
	I.D .	O.D.	psi	bar	psi	bar	ftm						
HR121008	6.5	10	22	15	88	60	27	8	PU Braid	-5 ~ +60	Yellow	Yellow	6Pcs/Ctn/22/4.2'
HR121010	6.5	10	22	15	88	60	33	10		-5 ~ +60	Yellow	Yellow	6Pcs/Ctn/22/4.2'
HR121012	6.5	10	22	15	88	60	40	12		-5 ~ +60	Yellow	Yellow	6Pcs/Ctn/22/4.2'
HR121015	8	12	0	15	0	60	27	8		-5 ~ +60	Yellow	Yellow	2Pcs/Ctn/17/2'
HR121018	6.5	10	22	15	88	60	33	10		-5 ~ +60	Blue	Yellow	2Pcs/Ctn/17/2'
HR121020	6.5	10	0	15	0	60	50	15		-5 ~ +60	Blue	Yellow	2Pcs/Ctn/17/2'
HR121025	8	12	22	15	88	60	33	10		-5 ~ +60	Blue	Yellow	2Pcs/Ctn/17/2'
HR121030	8	12	0	15	0	60	40	12		-5 ~ +60	Blue	Yellow	2Pcs/Ctn/17/2'
HR041010	8	12	22	15	88	60	50	15		-5 ~ +60	Blue	Yellow	2Pcs/Ctn/17/2'
HR041015	10	15	0	15	0	60	33	10		-5 ~ +60	Blue	Yellow	2Pcs/Ctn/17/2'
HR041018	6.5	10	22	15	88	60	50	15		-5 ~ +60	Blue	Blue	3Pcs/Ctn/4'
HR041020	8	12	0	15	0	60	33	10		-5 ~ +60	Blue	Blue	3Pcs/Ctn/4'
HR041025	8	12	22	15	88	60	40	12		-5 ~ +60	Blue	Blue	3Pcs/Ctn/4'
HR041030	8	12	0	15	0	60	50	15		-5 ~ +60	Blue	Blue	3Pcs/Ctn/4'
HR041035	9.5	13.5	22	15	88	60	33	10		-5 ~ +60	Blue	Blue	4Pcs/Ctn/3.3'
HR041040	9.5	13.5	0	15	0	60	50	15		-5 ~ +60	Blue	Blue	2Pcs/Ctn/3'
HR041045	6.5	10	22	15	88	60	60	18		-5 ~ +60	Blue	Blue	2Pcs/Ctn/3'
HR041050	6.5	10	0	15	0	60	65	20		-5 ~ +60	Blue	Blue	2Pcs/Ctn/3'
HR041055	8	12	22	15	88	60	60	18		-5 ~ +60	Blue	Blue	2Pcs/Ctn/3'
HR041060	8	12	0	15	0	60	65	20		-5 ~ +60	Blue	Blue	2Pcs/Ctn/3'
HR041065	8	12	0	15	0	60	65	20		-5 ~ +60	Blue	Blue	2Pcs/Ctn/3'
HR300715	9.5	13.5	22	15	88	60	60	18		-5 ~ +60	Blue	Blue	2Pcs/Ctn/3'
HR300720	9.5	13.5	0	15	0	60	65	20		-5 ~ +60	Blue	Blue	2Pcs/Ctn/3'
HR300810	6.5	10	22	15	88	60	100	30		-5 ~ +60	Blue, Red, Orange	Black, Red	1Pcs/Ctn/9/1.3'
HR300815	6.5	10	0	15	0	60	165	50		-5 ~ +60	Blue, Red, Orange	Black, Red	1Pcs/Ctn/9/1.3'
HR300820	8	12	22	15	88	60	66	20		-5 ~ +60	Blue, Red, Orange	Black, Red	1Pcs/Ctn/9/1.3'
HR300825	8	12	0	15	0	60	100	30		-5 ~ +60	Blue, Red, Orange	Black, Red	1Pcs/Ctn/9/1.3'
HR300830	8	12	22	15	88	60	132	40		-5 ~ +60	Blue, Red, Orange	Black, Red	1Pcs/Ctn/9/1.3'
HR300835	9.5	14.5	0	15	0	60	66	20		-5 ~ +60	Blue	Black, Red	1Pcs/Ctn/9/1.3'
HR301010	9.5	14.5	22	15	88	60	100	30		-5 ~ +60	Blue	Black, Red	1Pcs/Ctn/9/1.3'
HR301015	10	15	0	15	0	60	66	20		-5 ~ +60	Blue	Black, Red	1Pcs/Ctn/9/1.3'
HR301020	8.5	12.5	22	15	88	60	66	20		-5 ~ +60	Blue	Black, Red	1Pcs/Ctn/9/1.3'
HR301025	8.5	12.5	0	15	0	60	100	30	-5 ~ +60	Blue	Black, Red	1Pcs/Ctn/9/1.3'	
HR310710			22		88				-5 ~ +60				
HR310715			0		0				-5 ~ +60				
HR310720			22		88				-5 ~ +60				
HR310725			0		0				-5 ~ +60				
HR310730			22		88				-5 ~ +60				

Tire Inflator & Tire Chuck



SA-6600F

Tire inflator w/gauge
(220psi /15 Bar)



SA-6605

Tire inflator / deflator
(220psi)



SA-6606

Tire inflator gauge
(150psi /10kg)



SA-6612

3-function tire gauge
200psi /14kg



NEW

ST-TC300 30cm rubber hose
ST-TC302 85cm rubber hose
3 in 1 digital tire inflator
200psi



ST-TC303 85cm rubber hose, 12" dual chuck
3 in 1 digital tire inflator
200psi



NEW

ST-TC304 for bicycle
3 in 1 digital tire inflator
200psi

SA-6612-3.5

with 3.5" gauge
200psi /14kg



AC-1001

5/16" I.D. hose
chuck (Brass)



SA-3363

Tire chuck w/ steel pipe




SA-33640Z

Dual head tire chuck
(Zinc)



SA-33682

10" dual head tire
chuck w/ 1/4" female
fitting (Zinc)



TC-3

Air tire chuck w/ 5/16"
(I.D.)
PVC hose (1ft)

Connector type:



A=Aro



N=Nitto



M=Milton



E=Orion



Professional Air Blow Gun



Zinc Thread

SA-5801Z Air blow gun series :

- body / trigger material: plastic POM(Polyoxymethylene)
- tube: steel material, Ø8mm Dia.
- working pressure: 75~120PSI (5~8kg)
- max pressure: 150PSI



SA-5801ZN(M)(E)
W/Zinc thread
(100mm-Tube)



SA-5801ZN(M)(E)-300
W/Zinc thread
(300mm-Tube)



SA-5801ZN(M)(E)-500
W/Zinc thread
(500mm-Tube)



SA-5801ZN(M)(E)-11
W/Zinc thread
Rubber Head



SA-5801ZN(M)(E)-13
W/Zinc thread
Safety head



SA-5801ZN(M)(E)-14
W/Zinc thread
3 fuctions (Air blow,
Tire Inflator & safety nozzle)



SA-5801ZN(M)(E)-15
W/Zinc thread
For blind hole



SA-5801ZN(M)(E)-16
W/Zinc thread
Increased air flow



SA-5801ZN(M)(E)K
10Pcs Air blow gun kit
(100mm Tube) In Display Unit

Connector type:



A=Aro



N=Nitto



M=Milton



E=Orion



SA-3320

Air blow gun w/2pcs nozzle



SA-3320K

Air blow gun kit



SA-3321

High volume blow gun



SA-3320H

Air seat blow gub kit
(3.5m memory recoil
air hose 1/4" O.D.)



SA-5800N

w/Nitto plug

SA-5800M

w/Milton plug

SA-5800E

w/Orion plug

100mm-tube

Ø6mm Dia. tube

SA-5800N-300

w/Nitto plug

SA-5800M-300

w/Milton plug

SA-5800E-300

w/Orion plug

300mm-tube

Ø6mm Dia. tube



SA-5910N

w/Nitto plug

SA-5910M

w/Milton plug

SA-5910E

w/Orion plug

High flow adjustable blow gun
(100mm tube) -Nylon body



SA-5910N-350

w/Nitto plug

SA-5910M-350

w/Milton plug

SA-5910E-350

w/Orion plug

High flow adjustable blow gun
(350mm tube) -Nylon body



SA-5600

Dryer blow gun
Variable air flow.
Working pressure : 2-4 bar
Air consumption at 4 bar : 350 L/min
Weight : 460g
Sound pressure at 4 bar : 72dB



SA-5710

Stationary type dryer jet Stand
w/2set of adapter &
hose 360° to operate
Length of pole : 89cm
Length of foot shelf :
96cm(dia.)



SA-5910-11

w/Rubber tip
(w/o Plug)

SA-5910N-11

w/Nitto plug

SA-5910M-11

w/Milton plug

SA-5910E-11

w/Orion plug

High flow adjustable blow gun
-Nylon body



SA-3325N

w/Nitto plug

SA-3325M

w/Milton plug

SA-3325E

w/Orion plug

Adjustable air blow gun
-Alum. housing



Professional High Flow Air Blow Gun

Features of SA-5902 Series:

- Air Inlet: 3/8" ● Max. Pressure: 250 psi (17.2 bar) ● Aluminum body ● Light weight and durable
- Meets or exceeds OSHA regulation ● Apply to clean big grain, heavy dust, deep and large area task



SA-5902N(M)(E)
Noise reduction nozzle



SA-5902N(M)(E)-1
Adjustable nozzle



SA-5902N(M)(E)-2
Centralized nozzle



SA-5902N(M)(E)-3
High flow nozzle



SA-5902N(M)(E)-300
300mm-tube

NEW SA-5902N(M)(E)-900

900mm-tube

NEW SA-5902N(M)(E)-1200

1200mm-tube

Features of SA-5930 Series:

- Air Inlet: 1/4" ● Max. Pressure: 215 psi (14.8 bar) ● Aluminum reinforced POM gun body, light weight and durable
- Long life time: It is up-down type valve structure design and it can reduce the wear of spring.
- Therefore the life time can be longer.



SA-5930N(M)(E)
50mm-tube



SA-5930N(M)(E)-120
120mm-tube



SA-5930LN(M)(E)
250mm-tube



SA-5930N(M)(E)-2
w/safety nozzle



SA-5930N(M)(E)-5
w/adjustable safety nozzle



SA-5930N(M)(E)-1
w/quick safety nozzle



SA-5930N(M)(E)-10
w/rubber tip
50mm steel tube



SA-5930N(M)(E)-11
w/rubber tip,
100mm steel tube



SA-5930N(M)(E)-20
High volume, w/safety nozzle



SA-5930N(M)(E)-21
Plastic nozzle



SA-5930N(M)(E)-22
Plastic high flow nozzle



SA-5930N(M)(E)-23
Plastic radial blowing nozzle

Connector type:



A=Aro



N=Nitto



M=Milton



E=Orion

SA-5940-300 260mm-Tube
SA-5940-600 570mm-Tube
SA-5940-900 870mm-Tube
SA-5940-1200 1180mm-Tube
Max. pressure: 120 psi (8.3 bar)
Air inlet: 1/4"
High volume blow gun



Features:

- Suitable for effortless and effective dust removal and dewatering after cleaning.
- Pocket-size and lightweight blow gun convenient for carrying and moving around your worksite.



Cone-shape nozzle

Effective spraying distance up to 50mm at spray width Ø60mm.

Push button design

Intuitive button control designing for operator comfort.



Scan for Product Video!



Rotation shock-wave nozzle

Provides optimal spray performance than traditional air guns while saving energy.


SA-BG900

Pocket type Air twister blow gun


Mini body design

Deal with any hard-to-access working area.

Wide range of sprays

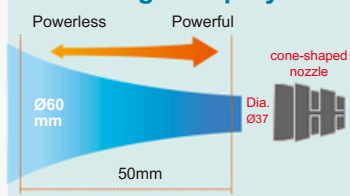

Dust removal and dewatering

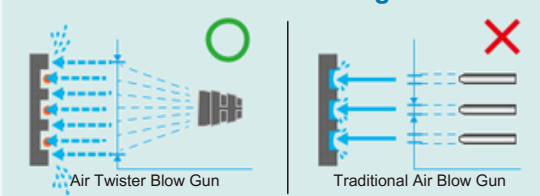

DG-10-1

Air duster w/1" nozzle

Max. pressure:
120 psi (8.3 bar)

Air Inlet: 1/4"



DG-10-2

Air duster w/2" nozzle



DG-10L

Air duster w/2 nozzles (1" & 4") High volume blow gun

SA-1031



SA-5505B

Air blow & vacuum gun kit
Alum. gun body



SA-5300

Composite air vacuum gun kit
Inc. 3 nozzles, extension tube,
12" flexible hose & vacuum
Dust bag (box package)

SA-5300K

Blow case package



Model No.	Free Speed (r.p.m)	Working Pressure	Air Inlet (PT)	Air Consumption		Overall Length		Net Weight		Packing Pcs/Ctn/G.W./Cuft (kgs)
				l/min	cfm	mm	in	kgs	lbs	
SA-BG900	6,000	6.3-8.0 bar	1/4"	80	2.8	150 x 95	6 x 3 -7/9	0.142	0.31	50Pcs/Ctn/11.8/2.3'

Model No.	Overall Length (Gun body)		Suction (With dust bag)	Air Inlet (PT)	Min. Hose Size	Air Consumption		Net Weight		Packing Pcs/Ctn/G.W./Cuft (kgs)
	mm	in				l/min	cfm	kgs	lbs	
SA-5505B	145	5-5/7	9cmHg	1/4"	5/16"	34	12	0.	1.5	20Pcs/Ctn/17/4'
SA-5300	145	5-5/7		1/4"	5/16"	0	12	7	4	20Pcs/Ctn/16/3.1'
						34		0.	1.5	
						0		7	4	

★Recommend air pressure: 6.2bar (90psi)

Air Accessories



SA-2003

1/4" male x 1/4" female regulator (Brass)



SA-2003A

1/4" male x 1/4" female regulator (Aluminum)



SA-2003B

1/4" male x 1/4" female regulator (Zinc)

Industrial



SA-4496

1/4" universal swivel connector (Aluminum shell, stainless steel body)

Industrial



SA-4496R

1/4" universal swivel connector w/regulator (Aluminum shell, stainless steel body)



39R20A

1/4" M x 1/4" F universal swivel air inlet joint w/regulator



3920A

1/4" M x 1/4" F universal swivel air inlet joint (Alum. alloy)



SA-2001A (Alum.)

1/4" air regulator



SA-20082A

1/4" air regulator



SA-20102A

1/4" air regulator



SA-2012

1/4" air regulator



DA-2001B

1/4" air regulator w/digital gauge (Alum. body)



DA-2002B

1/4" air regulator w/digital gauge (Zinc body)



DA-2003B

1/4" air regulator w/digital gauge (Plastic body)



SA-3330

3/8" mini oiler



SA-3340

1/4" mini oiler



SA-3330A

3/8" mini oiler (Alum.)

SA-3340A

4" mini oiler



SA-4490

1/4" swivel connector



SA-4491

1/4" swivel connector w/regulator



SA-2202

oil & water separator




SA-2002A

oil & water separator




SA-2002B

oil & water separator

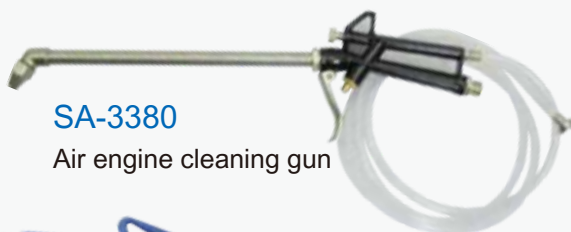

SA-3380

Air engine cleaning gun

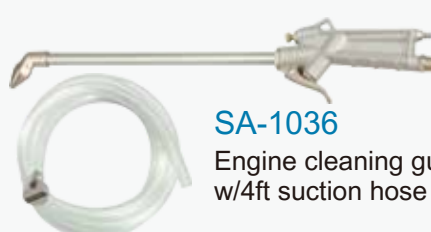

SA-1036

Engine cleaning gun w/4ft suction hose



SA-5513

Air under coating gun



SA-5500

Engine cleaning gun



SA-1032

Engine cleaning gun w/700c.c. tank

Suction Cup & Vacuum Dent Puller



SC-9601P08 SC-9601P09
Pump vacuum suction cup w/ Brass handle



SC-9601P08A
Pump vacuum suction cup w/ Plastic handle

SC-9601

Single suction cup w/ spherical rubber pad

SC-9601J Ø100mm

Single suction cup w/ spherical rubber pad

SC-9601K Ø75mm

Single suction cup w/ spherical rubber pad



SC-002
Single suction cup (Plastic housing)



SC-9801A
Single suction cup (Chrom plated)




SC-9602
Suction cup (Dual. Cap)



SC-9602A
Suction cup (Adjustable Dual. Grip)



SC-001
2pc Double suction cup Set w/ratchet tire down

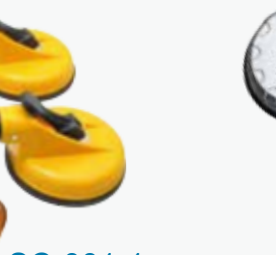

SC-001-1
1pc Double suction cup



SC-9803
Suction cup-3 grips fix style (Nickel plated)



SC-9804
Suction cup-4 grips fix style (Nickel plated)



SC-9901M
Manual vacuum dent puller



SC-9901A
Pneumatic vacuum dent puller

Model No.	Weight (g)	Capacity (kgs)	Diameter (Ømm)	Description			
SC-9601P08	2,00	100 	200	Pump Vacuum Suction Cup			
SC-9601P09	0	120 	230	Pump Vacuum Suction Cup			
SC-9601P08A	2,30	80 	200	Pump Vacuum Suction Cup			
SC-9601	0	20 	125	Spherical Cap			
SC-9601J	850	15 	100	Spherical Cap			
SC-9601K	450	50 	117	Dual			
SC-9601L	2,350	150 	118	Cap			
SC-9602	650			Dual			
Model No.	PAD Thread	Adsorption	Exhaust	NCap Level (dB)	Sliding Hammer		
					kgs	lbs	
SC-9901M	M1	Manual	-	-	1.2	2.64	
SC-9901A	8	Pneumatic	Upper	78	2	2.64	
	M1				1.2		
	8				2		

Model No.	Weight (g)	Capacity (kg s)	Diameter (Ømm)	Description
SC-9601K	350	1	75	Spherical Cap
SC-002	330	0	118	Single cup - flat
SC-002	470	4	123	Single cup
SC-9801A	1,150	0	117	Adjustable Dual Grip
SC-9802A	700	4	118	Dual Cap
SC-001-	1,340	100	123	Three-grip Fix Style.To Plate With Chromium
SC-9803	1,840	20	123	Suction Cup-4 Grips Fix Style
Model No.	Weight (g)	Capacity (kg s)	Diameter (Ømm)	Description
SC-9901M	770	2	30-31/100	1.2 2.64
SC-9901A	630	2	24-4/5	6 6.1
		2		8
				3Pcs/Ctn/14.9/
				1.6'



Pneumatic Tools



VISIT US at: www.spspneumatictools.com

Visit Our Website
www.spspneumatictools.com

Email Us
staplespackagingsolutions@gmail.com

Sushil Mishra-
+91 7011218105

Sales-
+91 9811579961

Varun Tiwari-
+91 8595503657

Phone
011-47002673